


Data Sheet

# Compressor overflow valve Type **POV**

Designed for protecting compressors against excessive pressure

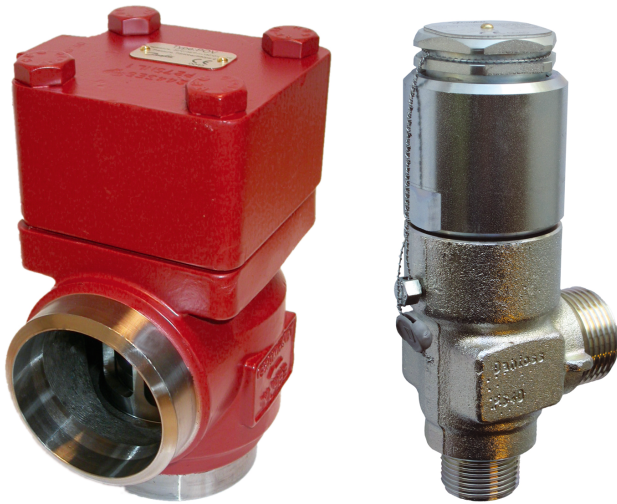

The POV compressor overflow valve is used in conjunction with the BSV safety relief valve and is specifically designed for protecting compressors against excessive pressure.

**Features**

- Applicable for the refrigerants HCFC, HFC, R717 (Ammonia), R744 (CO<sub>2</sub>).
- The Pilot Operated Internal compressor overflow valve System POV + BSV is available in sizes from DN 40 to DN 80.
- POV + BSV is an internal compressor overflow system thus eliminating the risk of refrigerant leakage to the atmosphere.
- The system renders full protection of the compressor even on increasing back pressure.
- The POV compressor overflow valve (main valve) has a very large capacity even with high back pressure when compared to direct operating back pressure independent pressure relief valves.
- Small dimensions mean easy handling and installation.
- Classification: DNV, CRN, BV, EAC etc. To get an updated list of certification on the products please contact your local Danfoss Sales Company.

**Function**

**Pilot valve BSV 8**

The pilot valve is actuated by the high pressure  $P_1$  and the back pressure  $P_2''$ . The reference pressure in the stainless steel bellows (1)  $P_0$  is the atmospheric pressure. The effective area of the bellows is equivalent to the area of the valve seating, so the back pressure  $P_2''$  does not affect the opening pressure of the valve.


**Main valve POV**

The main valve is of the normally closed (N.C.) type. The high pressure  $P_1$  acts on the valve inlet side of the valve cone (2).  $P_1$  pressure also passes through the piston rod (3) to the upper chamber (4) of the valve, acting on the top of the piston (5). The area of the piston is larger than the area of the valve seat and this together with the spring pressure keeps the valve closed.

**System BSV 8 + POV**

When the pressure  $P_1$  reaches the set pressure of the pilot valve, it starts opening. The pressure of the pilot line  $P_2''$  and of the lower chamber (6) of the main valve increases. The pressure of the lower chamber is limited by flow through the nozzle (7). When the flow through the pilot valve exceeds the capacity of the nozzle, the pressure of the chamber (6) increases, providing the opening of the main valve. When the pressure  $P_1$  is reduced, the pilot valve closes, and the pressure  $P_2''$  is equalized through the nozzle (7). The spring then closes the main valve. The closing time is  $\leq 30$  seconds.

Table 1: Function

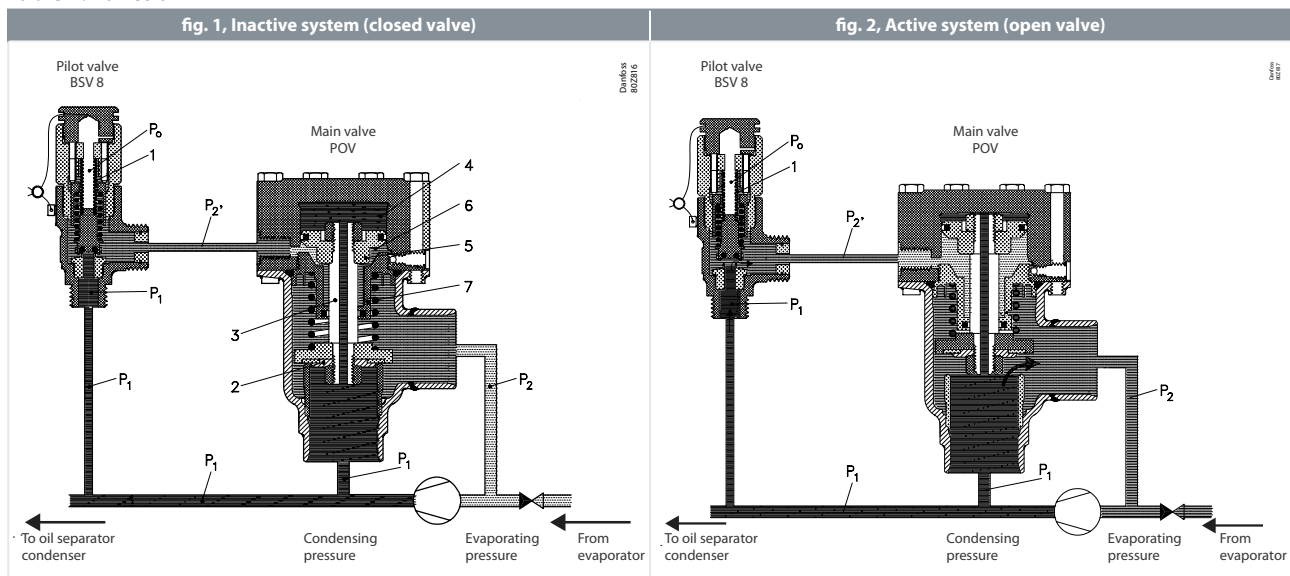

**Installation of compressor overflow valve POV + BSV**

**Set pressure**

The BSV 8 set pressure is factory set in the range 15 - 25 bar(g) (145 - 363 psig), where 15 bar(g) is the minimum value for this application [Figure 6: Capacity - POV 600](#).

**Standard set pressures**

18.0, 21.0, or 25.0 bar(g) (261, 305 or 363 psig). The operational pressure of the plant should be at least 15% below the set pressure of the pilot valve, and the opening pressure of the pilot valve (pset + 10%) must be below the reseating pressure of the safety valve protecting the plant. This implies a perfect operation of the plant.

**Back pressure**

$P_{2-0}$  is the effective back pressure of the POV main valve  $P_{2-0} = P_{2-1} + \Delta P_{outlet}$  where  $\Delta P_{outlet}$  is the pressure loss in the outlet line of POV (2).

$P_{2-1}$  is normally equal to the evaporating pressure.

$P_{2-0}$  must not exceed the limits in [Figure 6: Capacity - POV 600](#).

**Pressure loss in inlet line**

## Compressor overflow valve, Type POV

The pressure loss in the inlet line of the POV (1) will not affect the function of the POV + BSV system, but a high pressure drop will reduce the capacity. If the pressure drop in the inlet line  $\Delta P_{inlet}$  exceed 3% of the opening pressure, the capacity reduction must be taken into consideration by calculation.


### Pressure drop in the pilot inlet line

In order to ensure a proper function of the POV + BSV system, the pilot valve must be activated by the plant pressure. It is important that the inlet line of the pilot valve is mounted in a way which ensures that the pilot pressure is identical with the plant pressure. If the pilot pressure is mounted in the inlet line of the POV valve, it must be verified that the pressure drop in the pilot inlet line (3)  $\Delta P_{inlet}$  does not exceed 3% of the opening pressure.

Table 2: Installation of compressor

| POV + BSV system |               |                        | Flow diagram  |
|------------------|---------------|------------------------|---|
| Plant            | Pressure      | Compressor safe system | <p>Figure 1: 3</p> <p style="text-align: right;">DANFOSS<br/>A146F06.12</p> |
|                  | High pressure |                        |   |

Figure 2: Fig. 4, range of application of BSV 8 - POV

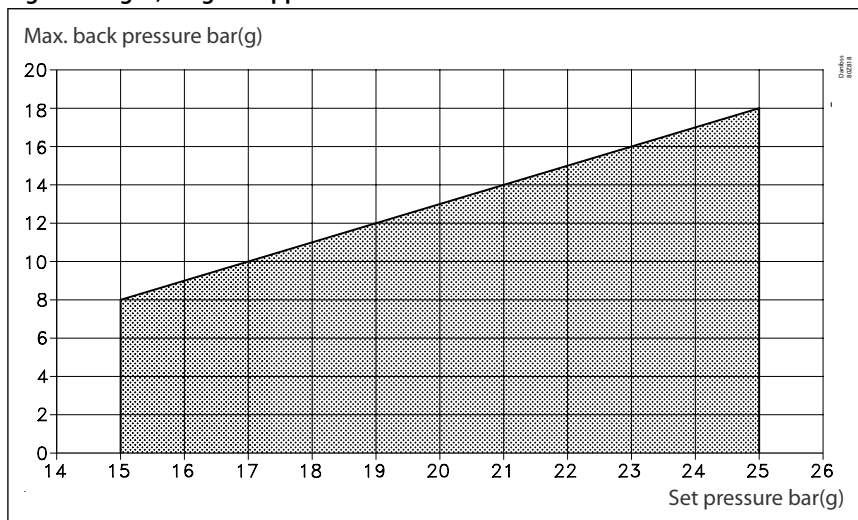

**Important:** When locating the inlet line to the pilot valve, it is important that the connection is mounted in the gas phase and not in an oil phase, if any.

- Pressure drop in the pilot outlet line
- The pressure loss in the BSV outlet line (4)  $\Delta P_{P-outlet}$  is not critical.
- Minimum internal diameter of the pilot outlet line 8 mm (0.314 in.)
- Maximum length of pilot outlet line 1 m (3.25 ft)

## Compressor overflow valve, Type POV

**Note:** The guidelines mentioned above are securing a safe function of the POV + BSV system, but there might be restrictions from national authorities.


**NOTE:**

**Valve type POV is categorized as a compressor overflow accessory (not as a safety accessory). Hence a safety valve (e.g. SFV) has to be installed to protect the system against excessive pressure.**

Fig. 5 shows a typical application of the POV + BSV system. In the example a non return valve has been mounted in the suction line, as well as a shut-off valve in the pressure line. It is good practise and a demand from the authorities of most countries to mount a safety valve on the oil separator.

If the shut-off valve in the pressure line is closed, and all regulation equipment fails, the pressure after the compressor will rise, and the BSV + POV system is activated. Provided that the required motor effect is present, there will be a rise in temperature caused by the compression work, followed by a rise in pressure. Therefore, the safety relief valve of the oil separator must, besides being dimensioned for "normal" heat input, also be dimensioned for heat input, corresponding to the effect of the motor.

**Figure 3: Installation of compressor overflow valve POV + BSV**

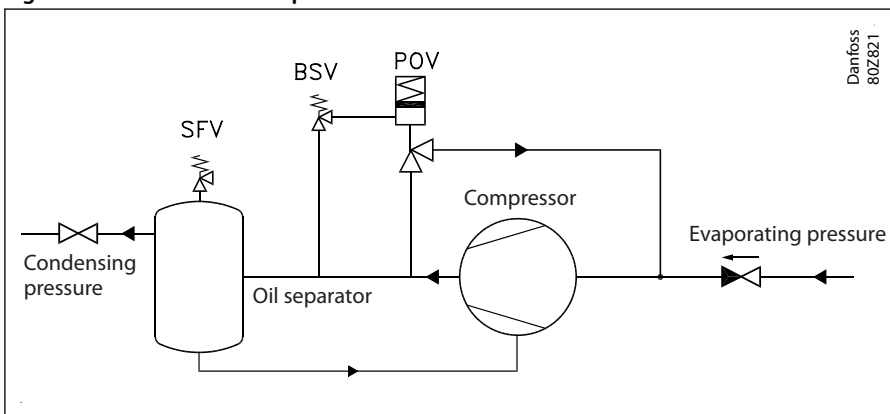

## Media

### **Refrigerants**

Applicable for the refrigerants HCFC, HFC, R717 (Ammonia), R744 (CO<sub>2</sub>). Flammable hydrocarbons are not recommended. For further information please contact your local Danfoss Sales Company

### **New refrigerants**

Danfoss products are continually evaluated for use with new refrigerants depending on market requirements.

When a refrigerant is approved for use by Danfoss, it is added to the relevant portfolio, and the R number of the refrigerant (e.g. R513A) will be added to the technical data of the code number. Therefore, products for specific refrigerants are best checked at [store.danfoss.com/en/](https://store.danfoss.com/en/), or by contacting your local Danfoss representative.

**Product specification**

**Pressure and temperature data**

Table 3: Pressure and temperature data

| Features               | Description                     |
|------------------------|---------------------------------|
| Pressure setting range | 15 - 25 bar(g) (218 - 363 psig) |
| Strength test          | 50 bar(g) (725 psig)            |
| Leakage test           | 25 bar(g) (363 psig)            |
| PB/MWP                 | 40 bar (580 psig)               |
| Temperature range      | -50/+150 °C (-58/+302 °F)       |

**Design**

**Control/Identification**

All pilot valves (BSV 8 Safety Relief Valves) are adjusted, tested and sealed before leaving Danfoss A/S. For that reason Danfoss can only guarantee correct operation, as long as the seal remains unbroken.

**Transport/Handling**

POV and BSV are supplied separately from Danfoss. BSV safety valves are fitted with special protection covers and packed in purpose made cartons. POV valves are provided with protection covers. It is important that the protective covers remain fitted until the valve is installed. To ensure the exact and precise operation of the valve it must be handled with care.

**Re-calibration/servicing**

In certain countries the authorities demand that the valves are readjusted at least once a year (see local rules).

**Capacity**

The design and construction of the compressor overflow valve has been tested and approved by TÜV. This test comprises control of the function of the valve as well as measuring of the capacity, which is the basis of the curves and tables on the following pages.

**Installations**

To ensure exact operation of the valve it should be installed with the spring housing upwards (refer to "Installation of compressor overflow valve POV + BSV" on the following pages).


When the valve is mounted, it is important to avoid the influence of static, dynamic and thermal stress.

**Connections**

Available with the following connections:

- Welding DIN (2448)
- Welding ANSI (B 36.10):
  - DN 40, Schedule 80
  - DN 65 - 80, Schedule 40

Figure 4: DIN




## Compressor overflow valve, Type POV

**Table 4: Welding DIN (2448)**

| Version  | Size | Size | øD   | T   | øD    | T     |
|----------|------|------|------|-----|-------|-------|
|          | mm   | in.  | mm   | mm  | in.   | in.   |
| POV 600  | 40   | 1½   | 48.3 | 2.6 | 1.902 | 0.103 |
| POV 1050 | 65   | 2½   | 76.1 | 2.9 | 3     | 0.11  |
| POV 2150 | 80   | 3    | 88.9 | 3.2 | 3.5   | 0.13  |

**Figure 5: ANSI**



**Table 5: Welding ANSI (B 36.10)**

| Version  | Size | Size | øD   | T   | øD    | T     | Schedule    |
|----------|------|------|------|-----|-------|-------|-------------|
|          | mm   | in.  | mm   | mm  | in.   | in.   |             |
| POV 600  | 40   | 1½   | 48.3 | 5.1 | 1.902 | 0.201 | Schedule 80 |
| POV 1050 | 65   | 2½   | 73   | 5.2 | 2.87  | 0.2   | Schedule 40 |
| POV 2150 | 80   | 3    | 88.9 | 5.5 | 3.5   | 0.22  | Schedule 40 |

## Capacity

The values in the table are based on saturated gas and with 50K superheat. If other operating conditions have to be taken into consideration, the formulas or the Danfoss computation program (Coolselector®<sup>2</sup>) can be used.

**Table 6: Table 1**

| Version  | Nominal size |        | Flow diameter | Flow area            | De-rated, certified coefficient of discharge<br>$K_{dr}$ |
|----------|--------------|--------|---------------|----------------------|--|
|          | Inlet        | Outlet | $d_o$         | $A_o$                |  |
| POV 600  | 40 mm        | 40 mm  | 32.6 mm       | 835 mm <sup>2</sup>  | 0.735  |
|          | 1½ in.       | 1½ in. | 1.28 in.      | 1.28 in <sup>2</sup> |  |
| POV 1050 | 65 mm        | 65 mm  | 39.8 mm       | 1244 mm <sup>2</sup> | 0.859  |
|          | 2½ in.       | 2½ in. | 1.56 in.      | 1.93 in <sup>2</sup> |  |
| POV 2150 | 80 mm        | 80 mm  | 59 mm         | 2734 mm <sup>2</sup> | 0.799  |
|          | 3 in.        | 3 in.  | 2.32 in.      | 4.24 in <sup>2</sup> |  |

The discharge capacity of the compressor overflow valves are based on (ISO 4126-1/EN 1268-1 / prEN 1313 6 (1998)).

$$q_m = 0.2883 \times C \times A_o \times K_{dr} \times K_b \times \sqrt{\frac{P}{V}}$$

## Compressor overflow valve, Type POV

|           |   |
|-----------|---|
| $q_m$     | Discharge capacity (kg/h)   |
| $C$       | Discharge function depending of the actual refrigerant ( $\kappa$ ) see table 2 (-)   |
| $A_0$     | Flow area of the compressor overflow valve (mm <sup>2</sup> ).  |
| $K_{dr}$  | De-rated coefficient of discharge ( $K_{dr} = K_d \times 0.9$ ), (the $K_{dr}$ is certified by TÜV) see table 1. (-)  |
| $K_b$     | Correction factor for sub-critical flow. (-) $K_b = 1.0$ when the back pressure is lower than approx. $0.5 \times$ relieving pressure ( $P_b < 0.5 \times p$ ). For all BSV safety valves $K_b = 1.0$ |
| $v$       | Specific volume of the vapour. (m <sup>3</sup> /kg)   |
| $p_{set}$ | Set pressure, the predetermined pressure at which a compressor overflow valve under operation starts to open ( $p_{set}$ is indicated on the metal plate on the safety relief valve). (bar gauge)     |
| $p_{atm}$ | Atmospheric pressure. (1 bar)   |
| $P$       | Relieving pressure, $p = p_{set} \times 1.1 + P_{atm}$ (bar absolute)   |

For further details see the above mentioned ISO or EN standards.


### Important!

For back pressure higher than  $0.5 \times p$ , the Danfoss computer program (DIRcalc™) or the above mentioned standard must be used when calculating the capacity.

Table 7: Table 2. Properties of Refrigerants

| Refrigerant number       | Isentropic exponent<br>K | Discharge function<br>C |
|--------------------------|--------------------------|-------------------------|
| R 22                     | 1.17                     | 2.54                    |
| R 134a                   | 1.12                     | 2.50                    |
| R 404A                   | 1.12                     | 2.49                    |
| R 410A                   | 1.17                     | 2.54                    |
| R 717 (Ammonia)          | 1.31                     | 2.64                    |
| R 744 (CO <sub>2</sub> ) | 1.30                     | 2.63                    |
| Air                      | 1.40                     | 2.70                    |

Figure 6: Capacity - POV 600

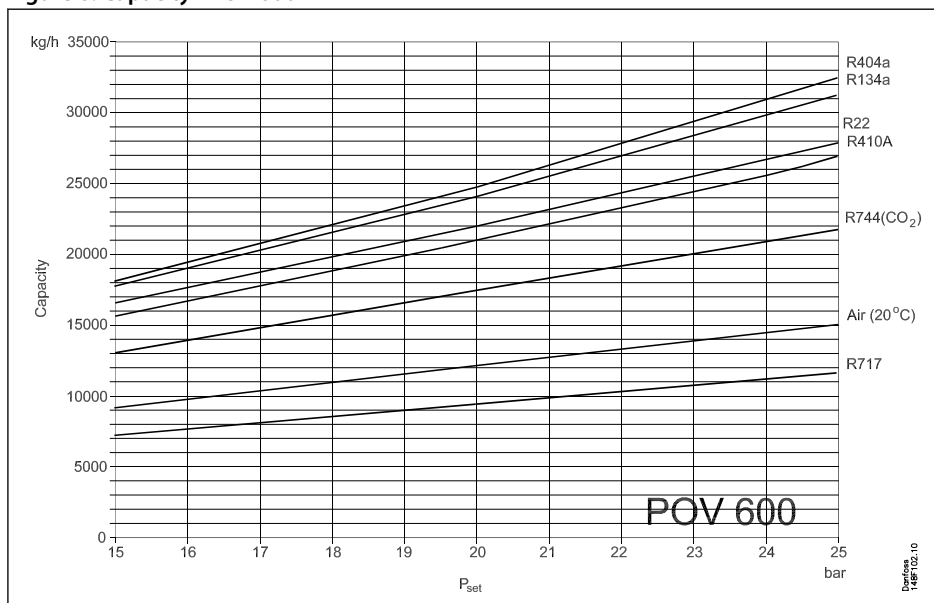

$$q_m = 0.2883 \times C \times A_0 \times K_{dr} \times K_b \times \sqrt{\frac{P}{V}}$$



## Compressor overflow valve, Type POV

|                        |   |
|------------------------|---|
| <b>P<sub>set</sub></b> | Set pressure in bar(g)  |
| <b>P</b>               | Relieving pressure in bar(g)  |
| <b>C</b>               | Discharge function  |
| <b>v</b>               | Specific volume of the vapour at the relieving pressure P in m <sup>3</sup> /kg |
| <b>q<sub>m</sub></b>   | Discharge capacity in kg/h  |
| <b>K<sub>b</sub></b>   | Correction factor for sub-critical flow   |
| <b>d<sub>o</sub></b>   | Flow diameter seat mm <sup>2</sup>  |
| <b>A<sub>o</sub></b>   | Flow area seat in mm <sup>2</sup>   |
| <b>K<sub>dr</sub></b>  | De-rated coefficient of discharge at defined lifting height                     |

**Table 8: Capacity - POV 600**


| <b>P<sub>set</sub></b> |      | <b>P</b> |      | <b>R22</b> |       |        | <b>R134a</b> |       |        | <b>R404a</b> |       |        | <b>R717</b> |       |        |
|------------------------|------|----------|------|------------|-------|--------|--------------|-------|--------|--------------|-------|--------|-------------|-------|--------|
| bar(g)                 | psig | bar(g)   | psig | v          | kg/h  | lb/min | v            | kg/h  | lb/min | v            | kg/h  | lb/min | v           | kg/h  | lb/min |
| 10                     | 145  | 12       | 174  | 0.01974    | 11077 | 407    | 0.01655      | 11907 | 437    | 0.01629      | 11953 | 439    | 0.10753     | 4933  | 181    |
| 11                     | 160  | 13.1     | 190  | 0.01797    | 12130 | 446    | 0.01502      | 13059 | 480    | 0.0147       | 13147 | 483    | 0.09867     | 5380  | 198    |
| 12                     | 174  | 14.2     | 206  | 0.01638    | 13228 | 486    | 0.01383      | 14169 | 521    | 0.01346      | 14305 | 526    | 0.0913      | 5823  | 214    |
| 13                     | 189  | 15.3     | 222  | 0.01514    | 14281 | 525    | 0.01273      | 15330 | 563    | 0.01233      | 15514 | 570    | 0.08461     | 6279  | 231    |
| 14                     | 203  | 16.4     | 238  | 0.014      | 15376 | 565    | 0.01172      | 16475 | 605    | 0.01128      | 16793 | 617    | 0.079       | 6728  | 247    |
| 15                     | 218  | 17.5     | 254  | 0.01311    | 16414 | 603    | 0.01094      | 17685 | 650    | 0.01048      | 17997 | 661    | 0.07383     | 7189  | 264    |
| 16                     | 232  | 18.6     | 270  | 0.01229    | 17477 | 642    | 0.01007      | 19004 | 698    | 0.00973      | 19256 | 708    | 0.06998     | 7613  | 280    |
| 17                     | 247  | 19.7     | 286  | 0.01152    | 18578 | 683    | 0.0094       | 20243 | 744    | 0.00902      | 20582 | 756    | 0.06636     | 8045  | 296    |
| 18                     | 261  | 20.8     | 302  | 0.0108     | 19716 | 724    | 0.00888      | 21400 | 786    | 0.00842      | 21889 | 804    | 0.06213     | 8544  | 314    |
| 19                     | 276  | 21.9     | 318  | 0.01012    | 20899 | 768    | 0.00828      | 22741 | 836    | 0.00786      | 23247 | 854    | 0.05898     | 8998  | 331    |
| 20                     | 290  | 23       | 334  | 0.00961    | 21978 | 808    | 0.00775      | 24089 | 885    | 0.00738      | 24586 | 903    | 0.0562      | 9446  | 347    |
| 21                     | 305  | 24.1     | 350  | 0.00908    | 23145 | 850    | 0.00727      | 25459 | 935    | 0.00688      | 26066 | 958    | 0.0535      | 9910  | 364    |
| 22                     | 319  | 25.2     | 365  | 0.00861    | 24305 | 893    | 0.00685      | 26820 | 985    | 0.00645      | 27528 | 1011   | 0.05121     | 10358 | 381    |
| 23                     | 334  | 26.3     | 381  | 0.0081     | 25599 | 941    | 0.00645      | 28235 | 1037   | 0.00606      | 29013 | 1066   | 0.049       | 10818 | 397    |
| 24                     | 348  | 27.4     | 397  | 0.00768    | 26834 | 986    | 0.00606      | 29733 | 1092   | 0.00565      | 30670 | 1127   | 0.04687     | 11290 | 415    |
| 25                     | 363  | 28.5     | 413  | 0.00738    | 27918 | 1026   | 0.00574      | 31158 | 1145   | 0.0053       | 32295 | 1187   | 0.04514     | 11733 | 431    |
| 26                     | 377  | 29.6     | 429  | 0.00699    | 29235 | 1074   | 0.00541      | 32707 | 1202   | 0.00496      | 34022 | 1250   | 0.04348     | 12183 | 448    |
| 27                     | 392  | 30.7     | 445  | 0.0067     | 30410 | 1117   | 0.00506      | 34442 | 1266   | 0.00463      | 35862 | 1318   | 0.0415      | 12700 | 467    |
| 28                     | 406  | 31.8     | 461  | 0.00634    | 31817 | 1169   | 0.00479      | 36028 | 1324   | 0.00429      | 37918 | 1393   | 0.0401      | 13149 | 483    |
| 29                     | 421  | 32.9     | 477  | 0.00607    | 33075 | 1215   | 0.00453      | 37683 | 1385   | 0.00401      | 39892 | 1466   | 0.0387      | 13615 | 500    |
| 30                     | 435  | 34       | 493  | 0.00579    | 34426 | 1265   | 0.00422      | 39690 | 1458   | 0.00371      | 42161 | 1549   | 0.0373      | 14098 | 518    |
| 31                     | 450  | 35.1     | 509  | 0.00552    | 35824 | 1316   | 0.00392      | 41842 | 1537   | 0.00339      | 44814 | 1647   | 0.03612     | 14556 | 535    |
| 32                     | 464  | 36.2     | 525  | 0.00523    | 37376 | 1373   | 0.00365      | 44036 | 1618   | 0.003        | 48378 | 1778   | 0.03482     | 15056 | 553    |
| 33                     | 479  | 37.3     | 541  | 0.00499    | 38841 | 1427   | 0.00337      | 46520 | 1709   | 0.00206      | 59262 | 2178   | 0.0337      | 15535 | 571    |
| 34                     | 493  | 38.4     | 557  | 0.00475    | 40393 | 1484   | 0.00306      | 49534 | 1820   |              |       |        | 0.03276     | 15987 | 587    |
| 35                     | 508  | 39.5     | 573  | 0.00452    | 41997 | 1543   | 0.00275      | 52994 | 1947   |              |       |        | 0.03158     | 16514 | 607    |
| 36                     | 522  | 40.6     | 589  | 0.00428    | 43755 | 1608   | 0.00221      | 59933 | 2202   |              |       |        | 0.03083     | 16945 | 623    |
| 37                     | 537  | 41.7     | 605  | 0.00408    | 45418 | 1669   |              |       |        |              |       |        | 0.02972     | 17491 | 643    |
| 38                     | 551  | 42.8     | 621  | 0.00389    | 47124 | 1731   |              |       |        |              |       |        | 0.02901     | 17935 | 659    |
| 39                     | 566  | 43.9     | 637  | 0.00365    | 49269 | 1810   |              |       |        |              |       |        | 0.02815     | 18440 | 678    |
| 40                     | 580  | 45       | 653  | 0.00345    | 51308 | 1885   |              |       |        |              |       |        | 0.0274      | 18923 | 695    |

Compressor overflow valve, Type POV

Table 9: Capacity - POV 600 (Continued)

| P <sub>set</sub> |      | P      |      | Air(20 °C) | q <sub>m</sub> |        | R410a   | q <sub>m</sub> |        | R744 (CO <sub>2</sub> ) | q <sub>m</sub> |        |
|------------------|------|--------|------|------------|----------------|--------|---------|----------------|--------|-------------------------|----------------|--------|
| bar(g)           | psig | bar(g) | psig | v          | kg/h           | lb/min | v       | kg/h           | lb/min | v                       | kg/h           | lb/min |
| 10               | 145  | 12     | 174  | 0.0679     | 6349           | 233    | 0.02213 | 10461          | 384    | 0.03196                 | 9014           | 331    |
| 11               | 160  | 13.1   | 190  | 0.0622     | 6931           | 255    | 0.02022 | 11435          | 420    | 0.0293                  | 9836           | 361    |
| 12               | 174  | 14.2   | 206  | 0.05738    | 7513           | 276    | 0.01848 | 12453          | 458    | 0.0269                  | 10688          | 393    |
| 13               | 189  | 15.3   | 222  | 0.05325    | 8095           | 297    | 0.0169  | 13517          | 497    | 0.02514                 | 11476          | 422    |
| 14               | 203  | 16.4   | 238  | 0.04968    | 8676           | 319    | 0.01569 | 14525          | 534    | 0.02352                 | 12283          | 451    |
| 15               | 218  | 17.5   | 254  | 0.04656    | 9258           | 340    | 0.01457 | 15570          | 572    | 0.02201                 | 13117          | 482    |
| 16               | 232  | 18.6   | 270  | 0.04381    | 9840           | 362    | 0.01353 | 16657          | 612    | 0.02061                 | 13974          | 513    |
| 17               | 247  | 19.7   | 286  | 0.04136    | 10422          | 383    | 0.01275 | 17659          | 649    | 0.01932                 | 14854          | 546    |
| 18               | 261  | 20.8   | 302  | 0.03917    | 11004          | 404    | 0.01201 | 18696          | 687    | 0.01825                 | 15704          | 577    |
| 19               | 276  | 21.9   | 318  | 0.03721    | 11586          | 426    | 0.01132 | 19760          | 726    | 0.01726                 | 16570          | 609    |
| 20               | 290  | 23     | 334  | 0.03543    | 12168          | 447    | 0.0106  | 20927          | 769    | 0.01645                 | 17394          | 639    |
| 21               | 305  | 24.1   | 350  | 0.03381    | 12750          | 468    | 0.00995 | 22110          | 812    | 0.0156                  | 18283          | 672    |
| 22               | 319  | 25.2   | 365  | 0.03233    | 13332          | 490    | 0.00944 | 23212          | 853    | 0.01485                 | 19162          | 704    |
| 23               | 334  | 26.3   | 381  | 0.03098    | 13914          | 511    | 0.00887 | 24463          | 899    | 0.0142                  | 20019          | 736    |
| 24               | 348  | 27.4   | 397  | 0.02974    | 14496          | 533    | 0.00847 | 25552          | 939    | 0.01355                 | 20918          | 769    |
| 25               | 363  | 28.5   | 413  | 0.02859    | 15078          | 554    | 0.00795 | 26899          | 988    | 0.01299                 | 21789          | 801    |
| 26               | 377  | 29.6   | 429  | 0.02753    | 15660          | 575    | 0.00758 | 28074          | 1032   | 0.01239                 | 22736          | 835    |
| 27               | 392  | 30.7   | 445  | 0.02654    | 16242          | 597    | 0.00722 | 29295          | 1076   | 0.01185                 | 23677          | 870    |
| 28               | 406  | 31.8   | 461  | 0.02562    | 16824          | 618    | 0.00687 | 30565          | 1123   | 0.01145                 | 24515          | 901    |
| 29               | 421  | 32.9   | 477  | 0.02477    | 17406          | 640    | 0.00653 | 31888          | 1172   | 0.01093                 | 25521          | 938    |
| 30               | 435  | 34     | 493  | 0.02396    | 17988          | 661    | 0.00621 | 33242          | 1221   | 0.01059                 | 26358          | 968    |
| 31               | 450  | 35.1   | 509  | 0.02321    | 18570          | 682    | 0.00589 | 34681          | 1274   | 0.01015                 | 27355          | 1005   |
| 32               | 464  | 36.2   | 525  | 0.02251    | 19152          | 704    | 0.00558 | 36185          | 1330   | 0.00978                 | 28301          | 1040   |
| 33               | 479  | 37.3   | 541  | 0.02184    | 19734          | 725    | 0.0053  | 37688          | 1385   | 0.00948                 | 29179          | 1072   |
| 34               | 493  | 38.4   | 557  | 0.02122    | 20316          | 746    | 0.00508 | 39059          | 1435   | 0.0091                  | 30217          | 1110   |
| 35               | 508  | 39.5   | 573  | 0.02063    | 20898          | 768    | 0.00478 | 40839          | 1501   | 0.00875                 | 31254          | 1148   |
| 36               | 522  | 40.6   | 589  | 0.02007    | 21479          | 789    | 0.00455 | 42437          | 1559   | 0.00847                 | 32206          | 1183   |
| 37               | 537  | 41.7   | 605  | 0.01954    | 22062          | 811    | 0.0043  | 44241          | 1626   | 0.0082                  | 33172          | 1219   |
| 38               | 551  | 42.8   | 621  | 0.01904    | 22643          | 832    | 0.00409 | 45957          | 1689   | 0.00794                 | 34153          | 1255   |
| 39               | 566  | 43.9   | 637  | 0.01856    | 23225          | 853    | 0.00385 | 47973          | 1763   | 0.00768                 | 35169          | 1292   |
| 40               | 580  | 45     | 653  | 0.01811    | 23808          | 875    | 0.00362 | 50089          | 1840   | 0.00743                 | 36201          | 1330   |

Figure 7: Capacity - POV 1050

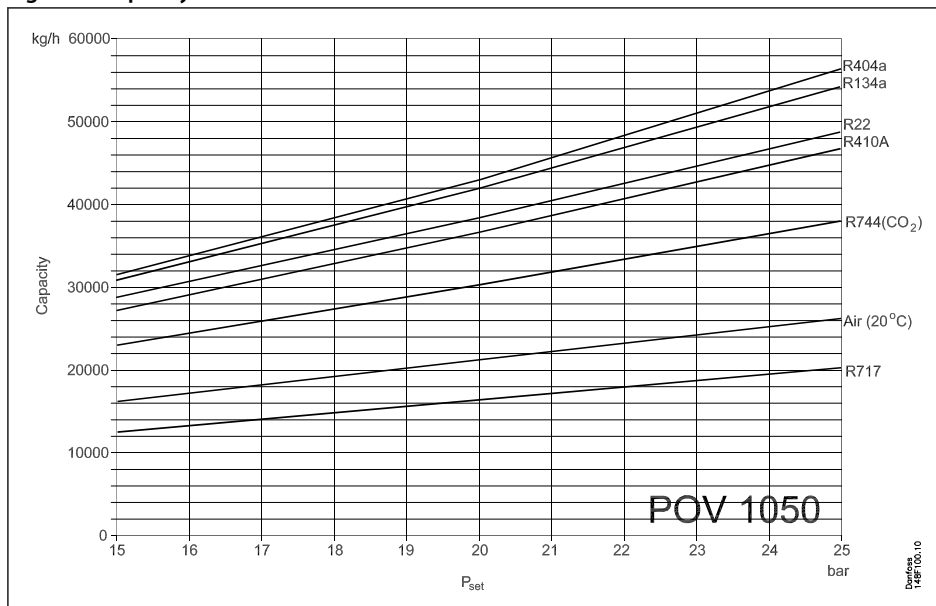

$$q_m = 0.2883 \times C \times A_0 \times K_{dr} \times K_b \times \sqrt{\frac{P}{V}}$$

## Compressor overflow valve, Type POV

|                        |   |
|------------------------|---|
| <b>P<sub>set</sub></b> | Set pressure in bar g   |
| <b>P</b>               | Relieving pressure in bar(g)  |
| <b>C</b>               | Discharge function  |
| <b>v</b>               | Specific volume of the vapour at the relieving pressure P in m <sup>3</sup> /kg |
| <b>q<sub>m</sub></b>   | Discharge capacity in kg/h  |
| <b>K<sub>b</sub></b>   | Correction factor for sub-critical flow   |
| <b>d<sub>o</sub></b>   | Flow diameter seat mm <sup>2</sup>  |
| <b>A<sub>o</sub></b>   | Flow area seat in mm <sup>2</sup>   |
| <b>K<sub>dr</sub></b>  | De-rated coefficient of discharge at defined lifting height                     |

**Table 10: Capacity - POV 1050**


| P <sub>set</sub> |      | P      |      | R22     |       |        | R134a   |        |        | R404a   |        |        | R717    |       |        |
|------------------|------|--------|------|---------|-------|--------|---------|--------|--------|---------|--------|--------|---------|-------|--------|
| bar(g)           | psig | bar(g) | psig | v       | kg/h  | lb/min | v       | kg/h   | lb/min | v       | kg/h   | lb/min | v       | kg/h  | lb/min |
| 10               | 145  | 12     | 174  | 0.01974 | 19295 | 709    | 0.01655 | 20741  | 762    | 0.01629 | 20822  | 765    | 0.10753 | 8593  | 316    |
| 11               | 160  | 13.1   | 190  | 0.01797 | 21129 | 776    | 0.01502 | 22748  | 836    | 0.0147  | 22902  | 841    | 0.09867 | 9372  | 344    |
| 12               | 174  | 14.2   | 206  | 0.01638 | 23042 | 847    | 0.01383 | 24681  | 907    | 0.01346 | 24918  | 916    | 0.0913  | 10144 | 373    |
| 13               | 189  | 15.3   | 222  | 0.01514 | 24878 | 914    | 0.01273 | 26703  | 981    | 0.01233 | 27024  | 993    | 0.08461 | 10938 | 402    |
| 14               | 203  | 16.4   | 238  | 0.014   | 26785 | 984    | 0.01172 | 28698  | 1054   | 0.01128 | 29252  | 1075   | 0.079   | 11719 | 431    |
| 15               | 218  | 17.5   | 254  | 0.01311 | 28592 | 1051   | 0.01094 | 30807  | 1132   | 0.01048 | 31350  | 1152   | 0.07383 | 12523 | 460    |
| 16               | 232  | 18.6   | 270  | 0.01229 | 30444 | 1119   | 0.01007 | 33104  | 1216   | 0.00973 | 33542  | 1232   | 0.06998 | 13261 | 487    |
| 17               | 247  | 19.7   | 286  | 0.01152 | 32362 | 1189   | 0.0094  | 35262  | 1296   | 0.00902 | 35853  | 1317   | 0.06636 | 14015 | 515    |
| 18               | 261  | 20.8   | 302  | 0.0108  | 34344 | 1262   | 0.00888 | 37279  | 1370   | 0.00842 | 38130  | 1401   | 0.06213 | 14883 | 547    |
| 19               | 276  | 21.9   | 318  | 0.01012 | 36405 | 1338   | 0.00828 | 39613  | 1456   | 0.00786 | 40495  | 1488   | 0.05898 | 15674 | 576    |
| 20               | 290  | 23     | 334  | 0.00961 | 38285 | 1407   | 0.00775 | 41961  | 1542   | 0.00738 | 42828  | 1574   | 0.0562  | 16455 | 605    |
| 21               | 305  | 24.1   | 350  | 0.00908 | 40317 | 1481   | 0.00727 | 44348  | 1630   | 0.00688 | 45405  | 1668   | 0.0535  | 17264 | 634    |
| 22               | 319  | 25.2   | 365  | 0.00861 | 42338 | 1556   | 0.00685 | 46718  | 1717   | 0.00645 | 47953  | 1762   | 0.05121 | 18043 | 663    |
| 23               | 334  | 26.3   | 381  | 0.0081  | 44593 | 1638   | 0.00645 | 49185  | 1807   | 0.00606 | 50540  | 1857   | 0.049   | 18844 | 692    |
| 24               | 348  | 27.4   | 397  | 0.00768 | 46744 | 1718   | 0.00606 | 51793  | 1903   | 0.00565 | 53425  | 1963   | 0.04687 | 19666 | 723    |
| 25               | 363  | 28.5   | 413  | 0.00738 | 48632 | 1787   | 0.00574 | 54275  | 1994   | 0.0053  | 56257  | 2067   | 0.04514 | 20438 | 751    |
| 26               | 377  | 29.6   | 429  | 0.00699 | 50925 | 1871   | 0.00541 | 56975  | 2093   | 0.00496 | 59265  | 2178   | 0.04348 | 21223 | 780    |
| 27               | 392  | 30.7   | 445  | 0.0067  | 52974 | 1946   | 0.00506 | 59997  | 2205   | 0.00463 | 62470  | 2295   | 0.0415  | 22123 | 813    |
| 28               | 406  | 31.8   | 461  | 0.00634 | 55424 | 2036   | 0.00479 | 62760  | 2306   | 0.00429 | 66051  | 2427   | 0.0401  | 22905 | 842    |
| 29               | 421  | 32.9   | 477  | 0.00607 | 57614 | 2117   | 0.00453 | 65642  | 2412   | 0.00401 | 69489  | 2553   | 0.0387  | 23716 | 871    |
| 30               | 435  | 34     | 493  | 0.00579 | 59969 | 2203   | 0.00422 | 69138  | 2540   | 0.00371 | 73442  | 2699   | 0.0373  | 24557 | 902    |
| 31               | 450  | 35.1   | 509  | 0.00552 | 62404 | 2293   | 0.00392 | 72886  | 2678   | 0.00339 | 78063  | 2868   | 0.03612 | 25356 | 932    |
| 32               | 464  | 36.2   | 525  | 0.00523 | 65107 | 2392   | 0.00365 | 76708  | 2819   | 0.003   | 84273  | 3096   | 0.03482 | 26226 | 964    |
| 33               | 479  | 37.3   | 541  | 0.00499 | 67660 | 2486   | 0.00337 | 81035  | 2978   | 0.00206 | 103232 | 3793   | 0.0337  | 27061 | 994    |
| 34               | 493  | 38.4   | 557  | 0.00475 | 70363 | 2585   | 0.00306 | 86286  | 3170   |         |        |        | 0.03276 | 27848 | 1023   |
| 35               | 508  | 39.5   | 573  | 0.00452 | 73157 | 2688   | 0.00275 | 92314  | 3392   |         |        |        | 0.03158 | 28767 | 1057   |
| 36               | 522  | 40.6   | 589  | 0.00428 | 76220 | 2801   | 0.00221 | 104400 | 3836   |         |        |        | 0.03083 | 29517 | 1085   |
| 37               | 537  | 41.7   | 605  | 0.00408 | 79116 | 2907   |         |        |        |         |        |        | 0.02972 | 30468 | 1120   |
| 38               | 551  | 42.8   | 621  | 0.00389 | 82087 | 3016   |         |        |        |         |        |        | 0.02901 | 31243 | 1148   |
| 39               | 566  | 43.9   | 637  | 0.00365 | 85825 | 3154   |         |        |        |         |        |        | 0.02815 | 32121 | 1180   |
| 40               | 580  | 45     | 653  | 0.00345 | 89377 | 3284   |         |        |        |         |        |        | 0.0274  | 32963 | 1211   |

Compressor overflow valve, Type POV

Table 11: Capacity - POV 1050 (Continued)

| P <sub>set</sub> |      | P      |      | Air(20 °C) | q <sub>m</sub> |        | R410a   | q <sub>m</sub> |        | R744 (CO <sub>2</sub> ) | q <sub>m</sub> |        |
|------------------|------|--------|------|------------|----------------|--------|---------|----------------|--------|-------------------------|----------------|--------|
| bar(g)           | psig | bar(g) | psig | v          | kg/h           | lb/min | v       | kg/h           | lb/min | v                       | kg/h           | lb/min |
| 10               | 145  | 12     | 174  | 0.0679     | 11059          | 406    | 0.02213 | 18223          | 670    | 0.03196                 | 15701          | 577    |
| 11               | 160  | 13.1   | 190  | 0.0622     | 12073          | 444    | 0.02022 | 19919          | 732    | 0.0293                  | 17134          | 630    |
| 12               | 174  | 14.2   | 206  | 0.05738    | 13087          | 481    | 0.01848 | 21693          | 797    | 0.0269                  | 18617          | 684    |
| 13               | 189  | 15.3   | 222  | 0.05325    | 14100          | 518    | 0.0169  | 23547          | 865    | 0.02514                 | 19990          | 735    |
| 14               | 203  | 16.4   | 238  | 0.04968    | 15114          | 555    | 0.01569 | 25301          | 930    | 0.02352                 | 21397          | 786    |
| 15               | 218  | 17.5   | 254  | 0.04656    | 16128          | 593    | 0.01457 | 27122          | 997    | 0.02201                 | 22849          | 840    |
| 16               | 232  | 18.6   | 270  | 0.04381    | 17141          | 630    | 0.01353 | 29016          | 1066   | 0.02061                 | 24343          | 894    |
| 17               | 247  | 19.7   | 286  | 0.04136    | 18155          | 667    | 0.01275 | 30761          | 1130   | 0.01932                 | 25875          | 951    |
| 18               | 261  | 20.8   | 302  | 0.03917    | 19169          | 704    | 0.01201 | 32568          | 1197   | 0.01825                 | 27356          | 1005   |
| 19               | 276  | 21.9   | 318  | 0.03721    | 20183          | 742    | 0.01132 | 34421          | 1265   | 0.01726                 | 28864          | 1061   |
| 20               | 290  | 23     | 334  | 0.03543    | 21197          | 779    | 0.0106  | 36453          | 1339   | 0.01645                 | 30299          | 1113   |
| 21               | 305  | 24.1   | 350  | 0.03381    | 22210          | 816    | 0.00995 | 38515          | 1415   | 0.0156                  | 31849          | 1170   |
| 22               | 319  | 25.2   | 365  | 0.03233    | 23224          | 853    | 0.00944 | 40434          | 1486   | 0.01485                 | 33380          | 1227   |
| 23               | 334  | 26.3   | 381  | 0.03098    | 24238          | 891    | 0.00887 | 42613          | 1566   | 0.0142                  | 34873          | 1281   |
| 24               | 348  | 27.4   | 397  | 0.02974    | 25251          | 928    | 0.00847 | 44510          | 1635   | 0.01355                 | 36438          | 1339   |
| 25               | 363  | 28.5   | 413  | 0.02859    | 26265          | 965    | 0.00795 | 46856          | 1722   | 0.01299                 | 37955          | 1395   |
| 26               | 377  | 29.6   | 429  | 0.02753    | 27279          | 1002   | 0.00758 | 48903          | 1797   | 0.01239                 | 39606          | 1455   |
| 27               | 392  | 30.7   | 445  | 0.02654    | 28293          | 1040   | 0.00722 | 51030          | 1875   | 0.01185                 | 41244          | 1515   |
| 28               | 406  | 31.8   | 461  | 0.02562    | 29307          | 1077   | 0.00687 | 53243          | 1956   | 0.01145                 | 42703          | 1569   |
| 29               | 421  | 32.9   | 477  | 0.02477    | 30321          | 1114   | 0.00653 | 55548          | 2041   | 0.01093                 | 44457          | 1634   |
| 30               | 435  | 34     | 493  | 0.02396    | 31334          | 1151   | 0.00621 | 57906          | 2128   | 0.01059                 | 45914          | 1687   |
| 31               | 450  | 35.1   | 509  | 0.02321    | 32348          | 1189   | 0.00589 | 60412          | 2220   | 0.01015                 | 47651          | 1751   |
| 32               | 464  | 36.2   | 525  | 0.02251    | 33361          | 1226   | 0.00558 | 63033          | 2316   | 0.00978                 | 49299          | 1811   |
| 33               | 479  | 37.3   | 541  | 0.02184    | 34375          | 1263   | 0.0053  | 65651          | 2412   | 0.00948                 | 50828          | 1868   |
| 34               | 493  | 38.4   | 557  | 0.02122    | 35389          | 1300   | 0.00508 | 68040          | 2500   | 0.0091                  | 52637          | 1934   |
| 35               | 508  | 39.5   | 573  | 0.02063    | 36403          | 1338   | 0.00478 | 71140          | 2614   | 0.00875                 | 54443          | 2000   |
| 36               | 522  | 40.6   | 589  | 0.02007    | 37416          | 1375   | 0.00455 | 73924          | 2716   | 0.00847                 | 56101          | 2061   |
| 37               | 537  | 41.7   | 605  | 0.01954    | 38430          | 1412   | 0.0043  | 77066          | 2832   | 0.0082                  | 57784          | 2123   |
| 38               | 551  | 42.8   | 621  | 0.01904    | 39444          | 1449   | 0.00409 | 80055          | 2942   | 0.00794                 | 59492          | 2186   |
| 39               | 566  | 43.9   | 637  | 0.01856    | 40458          | 1487   | 0.00385 | 83566          | 3071   | 0.00768                 | 61263          | 2251   |
| 40               | 580  | 45     | 653  | 0.01811    | 41472          | 1524   | 0.00362 | 87253          | 3206   | 0.00743                 | 63061          | 2317   |

Figure 8: Capacity - POV 2150

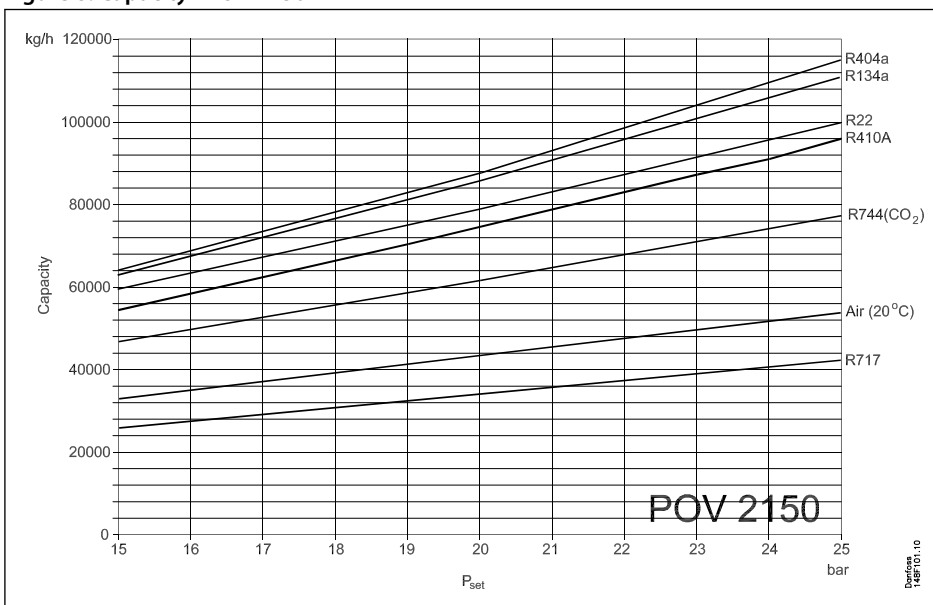

$$q_m = 0.2883 \times C \times A_0 \times K_{dr} \times K_b \times \sqrt{\frac{P}{V}}$$

## Compressor overflow valve, Type POV

|                        |   |
|------------------------|---|
| <b>P<sub>set</sub></b> | Set pressure in bar(g)  |
| <b>P</b>               | Relieving pressure in bar(g)  |
| <b>C</b>               | Discharge function  |
| <b>v</b>               | Specific volume of the vapour at the relieving pressure P in m <sup>3</sup> /kg |
| <b>q<sub>m</sub></b>   | Discharge capacity in kg/h  |
| <b>K<sub>b</sub></b>   | Correction factor for sub-critical flow   |
| <b>d<sub>o</sub></b>   | Flow diameter seat mm <sup>2</sup>  |
| <b>A<sub>o</sub></b>   | Flow area seat in mm <sup>2</sup>   |
| <b>K<sub>dr</sub></b>  | De-rated coefficient of discharge at defined lifting height                     |

| P <sub>set</sub> |      | P      |      | R22     |        |        | R404a   |        |        | R717    |       |        |
|------------------|------|--------|------|---------|--------|--------|---------|--------|--------|---------|-------|--------|
| bar(g)           | psig | bar(g) | psig | v       | kg/h   | lb/min | v       | kg/h   | lb/min | v       | kg/h  | lb/min |
| 10               | 145  | 12     | 174  | 0.01974 | 39440  | 1449   | 0.01629 | 42561  | 1564   | 0.10753 | 17564 | 645    |
| 11               | 160  | 13.1   | 190  | 0.01797 | 43190  | 1587   | 0.0147  | 46812  | 1720   | 0.09867 | 19157 | 704    |
| 12               | 174  | 14.2   | 206  | 0.01638 | 47098  | 1731   | 0.01346 | 50934  | 1871   | 0.0913  | 20735 | 762    |
| 13               | 189  | 15.3   | 222  | 0.01514 | 50851  | 1868   | 0.01233 | 55239  | 2030   | 0.08461 | 22358 | 821    |
| 14               | 203  | 16.4   | 238  | 0.014   | 54749  | 2012   | 0.01128 | 59793  | 2197   | 0.079   | 23955 | 880    |
| 15               | 218  | 17.5   | 254  | 0.01311 | 58444  | 2147   | 0.01048 | 64080  | 2355   | 0.07383 | 25597 | 941    |
| 16               | 232  | 18.6   | 270  | 0.01229 | 62230  | 2287   | 0.00973 | 68562  | 2519   | 0.06998 | 27106 | 996    |
| 17               | 247  | 19.7   | 286  | 0.01152 | 66149  | 2431   | 0.00902 | 73285  | 2693   | 0.06636 | 28646 | 1053   |
| 18               | 261  | 20.8   | 302  | 0.0108  | 70200  | 2579   | 0.00842 | 77940  | 2864   | 0.06213 | 30421 | 1118   |
| 19               | 276  | 21.9   | 318  | 0.01012 | 74413  | 2734   | 0.00786 | 82774  | 3041   | 0.05898 | 32038 | 1177   |
| 20               | 290  | 23     | 334  | 0.00961 | 78257  | 2875   | 0.00738 | 87543  | 3217   | 0.0562  | 33635 | 1236   |
| 21               | 305  | 24.1   | 350  | 0.00908 | 82411  | 3028   | 0.00688 | 92811  | 3410   | 0.0535  | 35287 | 1297   |
| 22               | 319  | 25.2   | 365  | 0.00861 | 86540  | 3180   | 0.00645 | 98018  | 3602   | 0.05121 | 36882 | 1355   |
| 23               | 334  | 26.3   | 381  | 0.0081  | 91150  | 3349   | 0.00606 | 103306 | 3796   | 0.049   | 38518 | 1415   |
| 24               | 348  | 27.4   | 397  | 0.00768 | 95546  | 3511   | 0.00565 | 109203 | 4013   | 0.04687 | 40199 | 1477   |
| 25               | 363  | 28.5   | 413  | 0.00738 | 99406  | 3653   | 0.0053  | 114992 | 4225   | 0.04514 | 41776 | 1535   |
| 26               | 377  | 29.6   | 429  | 0.00699 | 104094 | 3825   | 0.00496 | 121141 | 4451   | 0.04348 | 43380 | 1594   |
| 27               | 392  | 30.7   | 445  | 0.0067  | 108281 | 3979   | 0.00463 | 127692 | 4692   | 0.0415  | 45220 | 1662   |
| 28               | 406  | 31.8   | 461  | 0.00634 | 113289 | 4163   | 0.00429 | 135011 | 4961   | 0.0401  | 46820 | 1720   |
| 29               | 421  | 32.9   | 477  | 0.00607 | 117767 | 4327   | 0.00401 | 142040 | 5219   | 0.0387  | 48477 | 1781   |
| 30               | 435  | 34     | 493  | 0.00579 | 122580 | 4504   | 0.00371 | 150120 | 5516   | 0.0373  | 50197 | 1844   |
| 31               | 450  | 35.1   | 509  | 0.00552 | 127557 | 4687   | 0.00339 | 159565 | 5863   | 0.03612 | 51829 | 1904   |
| 32               | 464  | 36.2   | 525  | 0.00523 | 133083 | 4890   | 0.003   | 172258 | 6329   | 0.03482 | 53608 | 1970   |
| 33               | 479  | 37.3   | 541  | 0.00499 | 138300 | 5082   | 0.00206 | 211011 | 7753   | 0.0337  | 55313 | 2032   |
| 34               | 493  | 38.4   | 557  | 0.00475 | 143826 | 5285   |         |        |        | 0.03276 | 56922 | 2092   |
| 35               | 508  | 39.5   | 573  | 0.00452 | 149537 | 5495   |         |        |        | 0.03158 | 58801 | 2161   |
| 36               | 522  | 40.6   | 589  | 0.00428 | 155797 | 5725   |         |        |        | 0.03083 | 60334 | 2217   |
| 37               | 537  | 41.7   | 605  | 0.00408 | 161717 | 5942   |         |        |        | 0.02972 | 62278 | 2288   |
| 38               | 551  | 42.8   | 621  | 0.00389 | 167790 | 6165   |         |        |        | 0.02901 | 63861 | 2346   |
| 39               | 566  | 43.9   | 637  | 0.00365 | 175430 | 6446   |         |        |        | 0.02815 | 65657 | 2412   |
| 40               | 580  | 45     | 653  | 0.00345 | 182690 | 6713   |         |        |        | 0.0274  | 67378 | 2476   |


## Compressor overflow valve, Type POV

**Table 12: Capacity - POV 2150 (Continued)**

| P <sub>set</sub> |      | P      |      | Air(20 °C) | q <sub>m</sub> |        | R410a   | q <sub>m</sub> |        | R744 (CO <sub>2</sub> ) | q <sub>m</sub> |        |
|------------------|------|--------|------|------------|----------------|--------|---------|----------------|--------|-------------------------|----------------|--------|
| bar(g)           | psig | bar(g) | psig | v          | kg/h           | lb/min | v       | kg/h           | lb/min | v                       | kg/h           | lb/min |
| 10               | 145  | 12     | 174  | 0.0679     | 22605          | 831    | 0.02213 | 37249          | 1369   | 0.03196                 | 32094          | 1179   |
| 11               | 160  | 13.1   | 190  | 0.0622     | 24677          | 907    | 0.02022 | 40716          | 1496   | 0.0293                  | 35022          | 1287   |
| 12               | 174  | 14.2   | 206  | 0.05738    | 26750          | 983    | 0.01848 | 44342          | 1629   | 0.0269                  | 38055          | 1398   |
| 13               | 189  | 15.3   | 222  | 0.05325    | 28822          | 1059   | 0.0169  | 48131          | 1768   | 0.02514                 | 40861          | 1501   |
| 14               | 203  | 16.4   | 238  | 0.04968    | 30894          | 1135   | 0.01569 | 51717          | 1900   | 0.02352                 | 43737          | 1607   |
| 15               | 218  | 17.5   | 254  | 0.04656    | 32966          | 1211   | 0.01457 | 55438          | 2037   | 0.02201                 | 46704          | 1716   |
| 16               | 232  | 18.6   | 270  | 0.04381    | 35038          | 1287   | 0.01353 | 59310          | 2179   | 0.02061                 | 49757          | 1828   |
| 17               | 247  | 19.7   | 286  | 0.04136    | 37110          | 1364   | 0.01275 | 62878          | 2310   | 0.01932                 | 52890          | 1943   |
| 18               | 261  | 20.8   | 302  | 0.03917    | 39183          | 1440   | 0.01201 | 66570          | 2446   | 0.01825                 | 55917          | 2055   |
| 19               | 276  | 21.9   | 318  | 0.03721    | 41254          | 1516   | 0.01132 | 70359          | 2585   | 0.01726                 | 58999          | 2168   |
| 20               | 290  | 23     | 334  | 0.03543    | 43327          | 1592   | 0.0106  | 74513          | 2738   | 0.01645                 | 61933          | 2276   |
| 21               | 305  | 24.1   | 350  | 0.03381    | 45399          | 1668   | 0.00995 | 78726          | 2893   | 0.0156                  | 65101          | 2392   |
| 22               | 319  | 25.2   | 365  | 0.03233    | 47471          | 1744   | 0.00944 | 82648          | 3037   | 0.01485                 | 68230          | 2507   |
| 23               | 334  | 26.3   | 381  | 0.03098    | 49543          | 1820   | 0.00887 | 87103          | 3201   | 0.0142                  | 71281          | 2619   |
| 24               | 348  | 27.4   | 397  | 0.02974    | 51615          | 1897   | 0.00847 | 90981          | 3343   | 0.01355                 | 74481          | 2737   |
| 25               | 363  | 28.5   | 413  | 0.02859    | 53687          | 1973   | 0.00795 | 95776          | 3519   | 0.01299                 | 77582          | 2851   |
| 26               | 377  | 29.6   | 429  | 0.02753    | 55760          | 2049   | 0.00758 | 99961          | 3673   | 0.01239                 | 80956          | 2975   |
| 27               | 392  | 30.7   | 445  | 0.02654    | 57832          | 2125   | 0.00722 | 104308         | 3833   | 0.01185                 | 84305          | 3098   |
| 28               | 406  | 31.8   | 461  | 0.02562    | 59904          | 2201   | 0.00687 | 108831         | 3999   | 0.01145                 | 87287          | 3207   |
| 29               | 421  | 32.9   | 477  | 0.02477    | 61977          | 2277   | 0.00653 | 113543         | 4172   | 0.01093                 | 90872          | 3339   |
| 30               | 435  | 34     | 493  | 0.02396    | 64048          | 2353   | 0.00621 | 118362         | 4349   | 0.01059                 | 93850          | 3448   |
| 31               | 450  | 35.1   | 509  | 0.02321    | 66121          | 2430   | 0.00589 | 123485         | 4537   | 0.01015                 | 97401          | 3579   |
| 32               | 464  | 36.2   | 525  | 0.02251    | 68192          | 2506   | 0.00558 | 128842         | 4734   | 0.00978                 | 100769         | 3703   |
| 33               | 479  | 37.3   | 541  | 0.02184    | 70265          | 2582   | 0.0053  | 134195         | 4931   | 0.00948                 | 103894         | 3817   |
| 34               | 493  | 38.4   | 557  | 0.02122    | 72337          | 2658   | 0.00508 | 139076         | 5110   | 0.0091                  | 107593         | 3953   |
| 35               | 508  | 39.5   | 573  | 0.02063    | 74410          | 2734   | 0.00478 | 145413         | 5343   | 0.00875                 | 111285         | 4089   |
| 36               | 522  | 40.6   | 589  | 0.02007    | 76480          | 2810   | 0.00455 | 151104         | 5552   | 0.00847                 | 114673         | 4214   |
| 37               | 537  | 41.7   | 605  | 0.01954    | 78554          | 2886   | 0.0043  | 157526         | 5788   | 0.0082                  | 118114         | 4340   |
| 38               | 551  | 42.8   | 621  | 0.01904    | 80625          | 2962   | 0.00409 | 163636         | 6013   | 0.00794                 | 121605         | 4468   |
| 39               | 566  | 43.9   | 637  | 0.01856    | 82697          | 3039   | 0.00385 | 170813         | 6276   | 0.00768                 | 125225         | 4601   |
| 40               | 580  | 45     | 653  | 0.01811    | 84770          | 3115   | 0.00362 | 178349         | 6553   | 0.00743                 | 128900         | 4736   |

## Dimensions and weights

**Table 13: Dimensions**

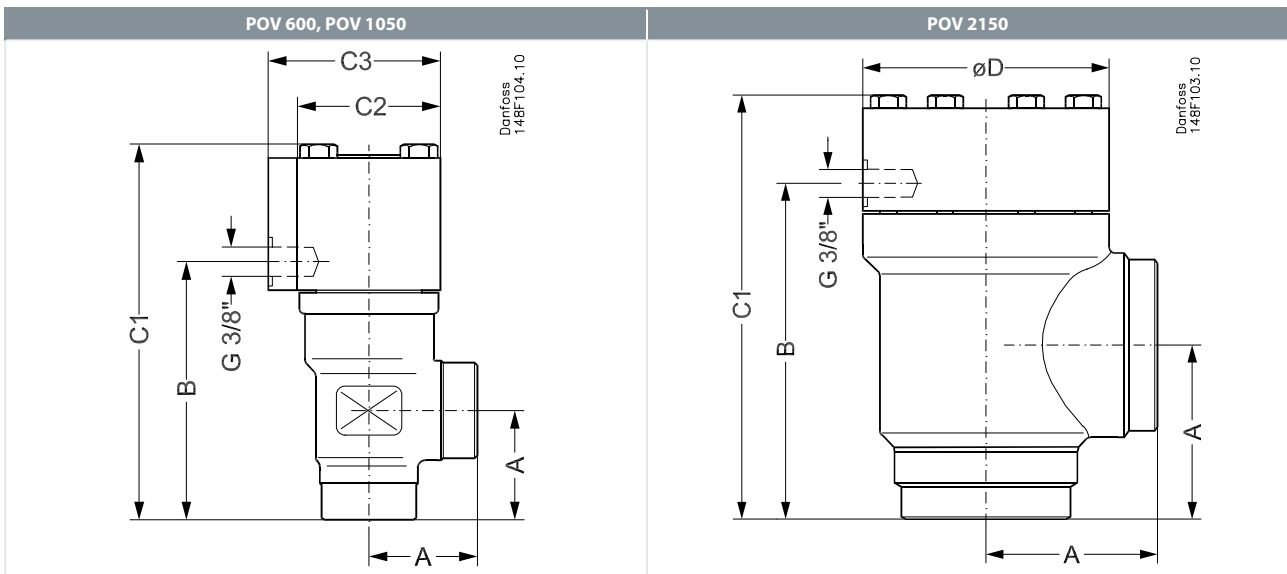

## Compressor overflow valve, Type POV

---

**Table 14: Dimensions and weight**

| Valve size      |    | A   | B   | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | ØD  | Weight  |
|-----------------|----|-----|-----|----------------|----------------|----------------|-----|---------|
| POV 600 1½ in   | mm | 55  | 130 | 188            | 73             | 88             |     | 5 kg    |
|                 | in | 2.2 | 5.1 | 7.4            | 2.8            | 3.5            |     | 11.0 lb |
| POV 1050 2½ in. | mm | 70  | 137 | 184            | 90             | 105            |     | 6 kg    |
|                 | in | 2.8 | 5.4 | 7.2            | 3.5            | 4.1            |     | 13.2 lb |
| POV 2150 3 in.  | mm | 90  | 174 | 219            |                |                | 130 | 11 kg   |
|                 | in | 3.5 | 6.9 | 8.6            |                |                | 5.1 | 24.2 lb |

Specified weights are approximate values only.

## Ordering

**Table 15: Ordering**

| Type                          | Code no. |
|-------------------------------|----------|
| POV 600 BUTT WELD DIN DN 40   | 2417+232 |
| POV 600 BUTT WELD ANSI DN 40  | 2417+047 |
| POV 1050 BUTT WELD DIN DN 65  | 148F3026 |
| POV 1050 BUTT WELD ANSI DN 65 | 148F3027 |
| POV 2150 BUTT WELD DIN DN 80  | 148F3033 |
| POV 2150 BUTT WELD ANSI DN 80 | 148F3034 |

### Nipples and gaskets

Attention: Fittings for connections must be ordered separately

**Table 16: Dimensions and weight**


| Size |     | Type                 | Code no. |
|------|-----|----------------------|----------|
| mm   | in. | For system POV + BSV | -        |
| 15   | ½   | Set of fittings      | 148H3453 |

**ⓘ IMPORTANT:**

Where products need to be certified according to specific certification societies or where higher pressures are required, the relevant information should be included at the time of order.

### Material specification

**Table 17: Material specification**

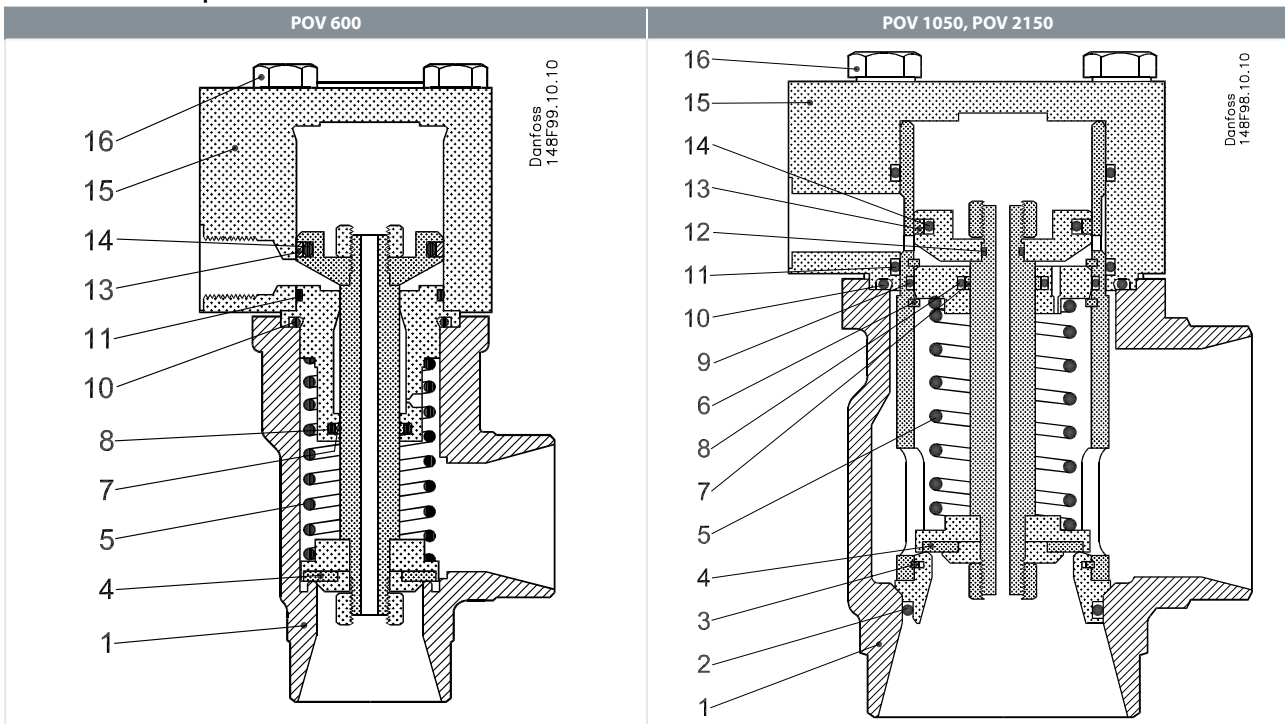

**Table 18: Material specification**

| No | Part          | Material               | EN         | ISO | ASTM      |
|----|---------------|------------------------|------------|-----|-----------|
| 1  | Housing       | Steel                  | P285QH     |     | LF2, A350 |
| 2  | O-ring        | Chloroprene (Neoprene) | EN 10222-4 |     |           |
| 3  | Spring ring   | Steel                  |            |     |           |
| 4  | Telfon washer | PTFE(Teflon)           |            |     |           |
| 5  | Spring        | Steel                  |            |     |           |
| 6  | Seeger        | Steel                  |            |     |           |
| 7  | Glide ring    | PTFE(Teflon)           |            |     |           |



## Compressor overflow valve, Type POV

---

| No     | Part       | Material               | EN      | ISO   | ASTM          |
|--------|------------|------------------------|---------|-------|---------------|
| 8 - 12 | O-ring     | Chloroprene (Neoprene) |         |       |               |
| 13     | Glide ring | PTFE(Teflon)           |         |       |               |
| 14     | O-ring     | Chloroprene (Neoprene) |         |       |               |
| 15     | Top cover  | Steel                  |         |       | Grade A, A662 |
| 16     | Bolt       | Stainless steel        | P275NL1 | A2-70 | Grade B8      |

**Certificates, declarations and approvals**

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at danfoss.com or contact your local Danfoss representative if you have any questions.

**Table 19: Valid approvals**


| File name                              | Document type                 | Document topic        | Approval authority |
|--|-------------------------------|-----------------------|--------------------|
| EAC RU Д-ДК.БЛ08.В.03706               | EAC Declaration               | Machinery & Equipment | EAC                |
| TÜV 0045 202 1204 Z 00354 19 D 001(00) | Pressure - Safety Certificate |                       | TÜV                |
| GMPI TSX71002520151142                 | Manufacturing Permission      |                       | GMPI               |
| EAC RU C-ДК.БЛ08.В.01096_20            | Pressure - Safety Certificate | PED                   | EAC                |
| MD 033F0691.AE                         | Manufacturers Declaration     | RoHS                  | Danfoss            |
| 033F0473.AD                            | Manufacturers Declaration     | ATEX                  | Danfoss            |

**Pressure Equipment Directive (PED)**

**Pressure Equipment Directive (PED)**

POV valves are approved according to the European standard specified in the Pressure Equipment Directive and are CE marked. For further details / restrictions - see Installation Instruction.

**Table 20: Pressure Equipment Directive (PED)**

| POV valves  |                |                  |                  |
|---|----------------|------------------|------------------|
|  | Nominal bore   | DN40 mm (1½ in.) | DN40 mm (1½ in.) |
|   | Classified for | Fluid group I    |                  |
|   | Category       | I                | II               |

## Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

### The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at [store.danfoss.com](https://store.danfoss.com).

### Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at [www.danfoss.com/en/service-and-support/documentation](https://www.danfoss.com/en/service-and-support/documentation).

### Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at [www.danfoss.com/en/service-and-support/learning](https://www.danfoss.com/en/service-and-support/learning).

### Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: [www.danfoss.com/en/choose-region](https://www.danfoss.com/en/choose-region).

### Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at [www.danfoss.com/en/service-and-support/downloads](https://www.danfoss.com/en/service-and-support/downloads).

### Coolselector®2 - find the best components for you HVAC/R system



Coolselector®2 makes it easy for engineers, consultants, and designers to find and order the best components for refrigeration and air conditioning systems. Run calculations based on your operating conditions and then choose the best setup for your system design.

Download Coolselector®2 for free at [coolselector.danfoss.com](https://coolselector.danfoss.com).

### Danfoss A/S

Climate Solutions • [danfoss.com](https://danfoss.com) • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.