

Copeland ZX Condensing Unit for Refrigeration Applications



Product Catalogue

ZX condensing unit for refrigeration applications



Copeland offers the ZX platform refrigeration condensing units specifically designed for medium temperature (ZX-MT), low temperature (ZXL-LT), digital modulated variable capacity medium temperature and low temperature (ZXD-MT & ZXLD-LT) refrigeration.

ZX series CDU has been highly successful in the Middle Eastern and African market and enjoys proven success with its energy savings and customer-friendly electronic features.



ZX Platform Condensing Unit was designed based on three factors demanded by industry users:

Intelligent store solutions - A most innovative approach to enterprise facility management, Copeland's Intelligent Store™ architecture integrates hardware and services to provide retailers a single view into their entire network of facilities and understanding what facilities actually cost to operate and maintain.

The Intelligent Store architecture transforms data from store equipment and controls into actionable insights. Designed to deliver value in both new and existing stores, Copeland aims to help retailers:

- Make better decisions on resources investment for maximum impact
- Receive accurate feedback and service customized to meet your specific needs
- Reduce operational costs and boost the profitability

Energy Efficiency - Utilizing Copeland Scroll™ compressor technology, variable speed fan motor, large capacity condenser coil and advanced control algorithms, energy consumption is significantly reduced. End-users can save more than 20% on annual energy costs compared to using hermetic reciprocating units.

Reliability - Combining the proven reliability of Copeland Scroll compressors with advanced electronics controller and diagnostics, equipment reliability is greatly enhanced. Fault code alerts and fault code retrieval capabilities provide information to help improve speed and accuracy of system diagnostics. Integrated electronics provide protection against over-current, overheating, incorrect phase rotation, compressor cycling, high pressure resets and low pressure cut-outs. It can also send out a warning message to the operator when there is liquid floodback, which can prevent critical damage to the unit.

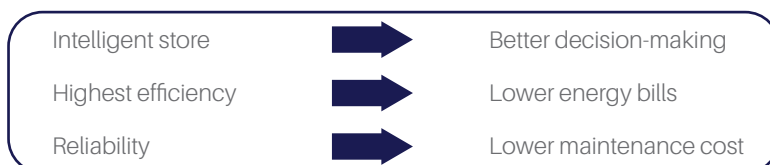


Table of contents

Features and Benefits	05
Nomenclature	06
Bill of Material	06
Compressor Electronics (previously CoreSense) for ZX	07
Performance Data	
ZX Family: Medium Temperature - R404A	08
ZX Family: Medium Temperature - R407F	10
ZX Family : Medium Temperature - R448A/R449A	11
ZXD Family : Medium Temperature - R404A	12
ZXD Family : Medium Temperature - R407F	14
ZXD Family : Medium Temperature - R448A/R449A	15
ZXL Family : Low Temperature - R404A	17
ZXL Family : Low Temperature - R407F	19
ZXL Family : Low Temperature - R448A/R449A	20
ZXLD Family : Low Temperature - R404A	21
ZXLD Family : Low Temperature - R448A/R449A	22
Technical Data	
ZX Family: Medium temperature at 50 Hz - PFJ	23
ZX Family: Medium temperature at 50 Hz - TFD	24
ZX Family: Medium temperature at 50 Hz - TFM	25
ZXD Family: Digital Medium temperature at 50 Hz - TFD/TFM	26
ZXL Family: Low temperature at 50 Hz - PFJ	27
ZXL Family: Low temperature at 50 Hz - TFD	28
ZXL Family: Low temperature at 50 Hz - TFM	29
ZXLD Family: Low temperature at 50 Hz -TFD/TFM	30
Dimensional Drawings	31
Packing Information	34
Conversion Chart	34
Contact List	36

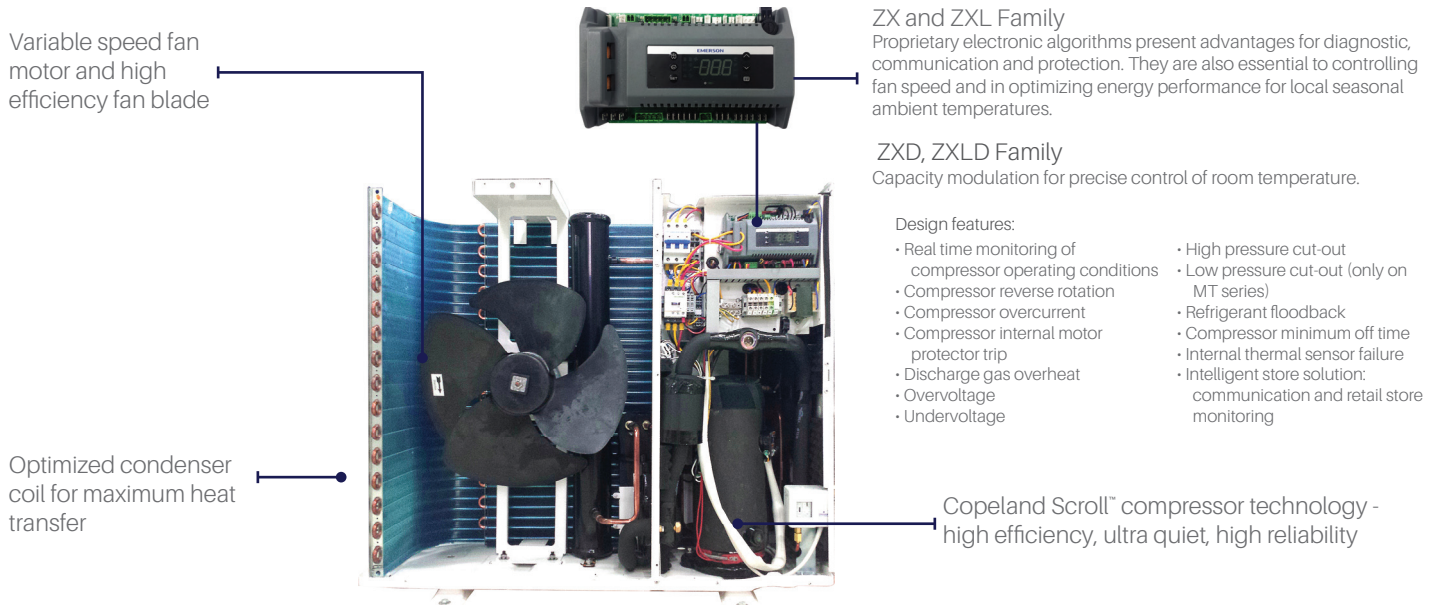


Figure 1. ZX Platform CDU features

Features	Owner/Enterprise Benefits
Intelligent store solution	<ul style="list-style-type: none"> • Retail store monitoring • Enhanced energy savings • High-end food safety through real time monitoring
Energy saving	<ul style="list-style-type: none"> • Lower operating costs
Diagnostic protection capabilities	<ul style="list-style-type: none"> • Greatly reduces the chance of nuisance service calls • Extends the life of your equipment • Reduces potential service costs • Keeps equipment operating at their original performance levels to ensure optimum energy efficiency and temperature control • Serves as a guide to what the contractor needs to fix in case of malfunction
Slim profile, lighter weight and optional wall mount capability	<ul style="list-style-type: none"> • Lower installation costs • Enhances the appearance of your enterprise site • Avoids more costly solutions arising from potential location issues
Sound improvement	<ul style="list-style-type: none"> • Creates a more comfortable environment for guests • Beneficial for regions with noise ordinances

Nomenclature

ZX	L	300	B	E	-	TFD	-	551
Unit family	Blank = Medium temp L = Low temp D = Digital medium temp LD = Digital low temp	2 - 30 HP	Generation	E = Ester oil		PFJ = 220V/240V - 1ph - 50 Hz TFD = 380V/420V - 3ph - 50 Hz TFM = 380V/420 V - 3ph - 50Hz TEM = 380V/420V-3ph - 50Hz TWM = 380V/420V-3ph - 50Hz		Bill of material
Base model						Electrical Code		Bill of Material

Bill of material

CDU Family BOM	ZX 2 to 30 HP		ZXL 2 to 30 HP		ZXD up to 9 HP		ZXLD 9 HP		ZXD 12 to 20 HP	ZXLD 12 to 20 HP
	551	521	551	521	551	521	551	521	523	523
Liquid Line Filter Drier	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Moisture Indicator	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Oil Separator	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Oil Reservoir									✓	✓
Accumulator			✓	✓			✓	✓	✓	✓
Adjustable LP Control Switch	✓	✓	✓	✓						
LP Transducer					✓	✓	✓	✓	✓	✓
HP Transducer		✓*		✓*					✓	✓
Fixed LP Safety Switch	✓	✓			✓	✓			✓	
Adjustable LP Safety Switch							✓	✓		✓
HP Safety Switch	✓	✓**	✓	✓**	✓	✓	✓	✓	✓	✓
Compressor Electronics	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Digital Modulation					✓	✓	✓	✓	✓	✓
Intelligent store ready	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fan speed controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Circuit breaker	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Compressor Sound Jacket	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Receiver certification (UL/PED)		✓		✓		✓		✓	✓	✓
Pressure Relief Valve		✓		✓		✓		✓	✓	✓
HP/LP Pressure Gauge		✓**		✓**					✓	✓

Notes:

- For all ZX upto ZXD090BE and ZXLD090BE, UL certification is available. For larger models PED certification is available.

- ZX (9 to 30 HP) and ZXL (10 to 30 HP) only available in 521 bill of material and in TFM/TEM electrical

*ZX (9 to 30 HP) and ZXL (10 to 30 HP)

**ZX (9 to 30 HP) and ZXL (10 to 30 HP), adjustable

Compressor Electronics (previously CoreSense) for ZX platform condensing unit


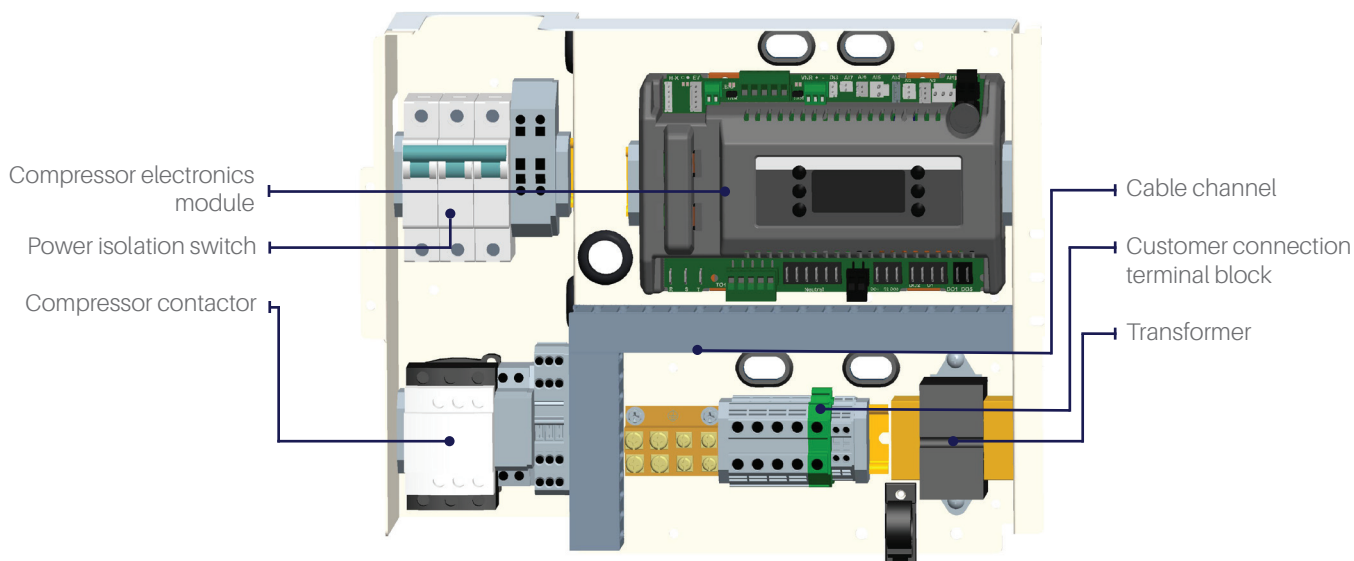


Figure 2. Layout of the intelligent store module

Module layout

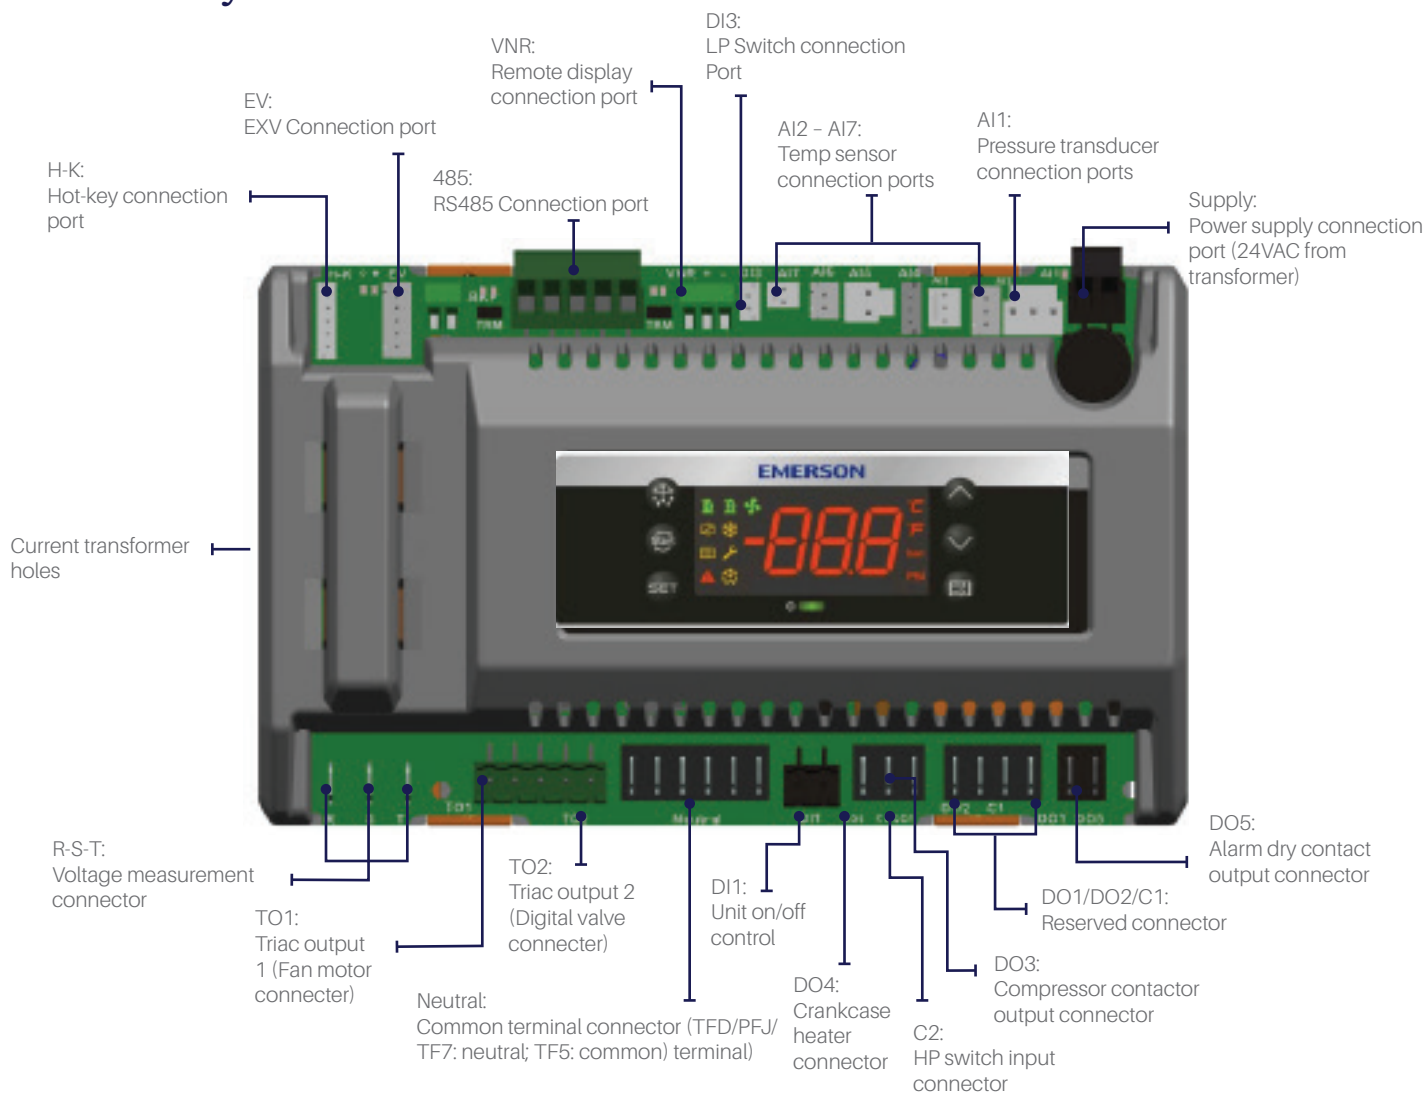

ZX Family: Medium temperature

Capacity and power (kW) at 50 Hz - PFJ/TFD

R404A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020BE ¹	27	2.85	3.44	4.10	4.83	5.64	6.53	1.46	1.49	1.53	1.57	1.60	1.64
	32	2.65	3.20	3.82	4.50	5.25	6.08	1.62	1.65	1.69	1.73	1.77	1.81
	38	2.41	2.91	3.46	4.09	4.77	5.52	1.83	1.87	1.91	1.95	1.99	2.03
	43	2.19	2.65	3.16	3.73	4.36	5.05	2.04	2.07	2.11	2.15	2.19	2.24
ZX025BE ²	27	3.25	3.92	4.67	5.50	6.42	7.42	1.68	1.72	1.76	1.80	1.85	1.90
	32	3.02	3.64	4.34	5.11	5.95	6.88	1.88	1.91	1.96	2.00	2.05	2.10
	38	2.73	3.29	3.91	4.61	5.37	6.21	2.14	2.18	2.23	2.27	2.32	2.36
	43	2.47	2.98	3.54	4.17	4.87	5.63	2.40	2.44	2.48	2.52	2.57	2.61
ZX030BE ¹	27	4.05	4.86	5.76	6.75	7.83	9.00	2.20	2.27	2.33	2.41	2.48	2.56
	32	3.75	4.50	5.33	6.24	7.24	8.31	2.46	2.53	2.59	2.67	2.75	2.83
	38	3.37	4.04	4.79	5.60	6.49	7.46	2.81	2.88	2.95	3.02	3.10	3.18
	43	3.03	3.64	4.31	5.04	5.85	6.72	3.15	3.22	3.29	3.36	3.43	3.51
ZX040BE ¹	27	5.20	6.29	7.48	8.77	10.15	11.60	2.75	2.84	2.95	3.06	3.19	3.34
	32	4.79	5.81	6.92	8.11	9.39	10.75	3.01	3.11	3.21	3.33	3.46	3.60
	38	4.27	5.20	6.21	7.29	8.44	9.65	3.36	3.46	3.57	3.69	3.82	3.96
	43	3.81	4.67	5.59	6.57	7.61	8.72	3.68	3.79	3.90	4.01	4.14	4.28
ZX050BE	27	6.96	8.38	9.98	11.75	13.70	15.85	3.48	3.56	3.65	3.74	3.84	3.94
	32	6.47	7.79	9.27	10.90	12.70	14.70	3.88	3.96	4.05	4.15	4.24	4.35
	38	5.84	7.04	8.37	9.84	11.45	13.25	4.43	4.51	4.61	4.70	4.80	4.90
	43	5.29	6.37	7.58	8.91	10.40	12.00	4.95	5.04	5.13	5.22	5.32	5.41
ZX060BE	27	8.02	9.64	11.45	13.45	15.60	17.95	4.01	4.11	4.23	4.35	4.49	4.63
	32	7.45	8.94	10.60	12.45	14.45	16.65	4.47	4.58	4.70	4.82	4.96	5.10
	38	6.71	8.06	9.55	11.20	13.00	14.95	5.10	5.22	5.34	5.46	5.60	5.73
	43	6.05	7.27	8.62	10.10	11.75	13.50	5.70	5.82	5.94	6.07	6.20	6.33
ZX075BE	27	9.03	10.85	12.85	15.05	17.45	20.00	4.57	4.70	4.84	5.00	5.16	5.34
	32	8.37	10.05	11.90	13.90	16.10	18.50	5.10	5.24	5.38	5.54	5.71	5.88
	38	7.52	9.02	10.65	12.50	14.45	16.60	5.82	5.97	6.12	6.27	6.44	6.61
	43	6.77	8.13	9.62	11.25	13.05	15.00	6.52	6.66	6.81	6.96	7.13	7.29
ZX076BE	27	9.09	10.90	12.95	15.20	17.60	20.30	4.53	4.65	4.79	4.93	5.09	5.26
	32	8.43	10.10	12.00	14.05	16.30	18.75	5.05	5.18	5.32	5.47	5.63	5.79
	38	7.58	9.10	10.80	12.65	14.65	16.85	5.77	5.91	6.05	6.20	6.35	6.52
	43	6.84	8.21	9.73	11.40	13.20	15.20	6.46	6.59	6.74	6.88	7.03	7.19

Notes: ¹ Available in PFJ & TFD model

² Available in PFJ model only

Rating condition is based on a return gas temperature of 20°C

Power input includes condenser fan

ZX Family: Medium temperature

Capacity and power (kW) at 50 Hz - TFM

R404A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX090BE	27	12.39	14.95	17.83	21.06	24.65	28.59	6.15	6.30	6.48	6.67	6.89	7.13
	32	11.56	13.96	16.64	19.63	22.94	26.59	6.74	6.89	7.06	7.25	7.46	7.69
	38	10.49	12.70	15.14	17.84	20.83	24.12	7.57	7.72	7.88	8.06	8.25	8.46
	43	9.53	11.57	13.82	16.29	19.01	22.01	8.37	8.51	8.67	8.83	9.01	9.20
ZX100BE	27	14.32	17.33	20.70	24.45	28.55	33.00	7.10	7.33	7.59	7.86	8.13	8.41
	32	13.34	16.18	19.33	22.82	26.62	30.73	7.81	8.04	8.29	8.55	8.83	9.11
	38	12.05	14.69	17.58	20.75	24.19	27.91	8.80	9.01	9.25	9.51	9.78	10.05
	43	10.88	13.34	16.01	18.91	22.05	25.44	9.76	9.95	10.17	10.42	10.67	10.94
ZX130BE	27	17.81	21.61	25.75	30.30	35.32	40.86	8.96	9.21	9.51	9.84	10.18	10.54
	32	16.37	20.05	23.99	28.26	32.92	38.02	9.93	10.16	10.45	10.76	11.11	11.46
	38	14.32	17.92	21.65	25.61	29.87	34.49	11.28	11.49	11.75	12.05	12.37	12.72
	43		15.86	19.45	23.19	27.14	31.39		12.76	12.99	13.27	13.58	13.90
ZX150BE	27	20.59	25.09	30.01	35.40	41.28	47.66	10.78	11.11	11.48	11.88	12.31	12.78
	32	18.80	23.10	27.77	32.83	38.34	44.29	11.93	12.25	12.60	12.99	13.40	13.86
	38	16.39	20.48	24.85	29.54	34.61	40.07	13.54	13.84	14.16	14.52	14.91	15.34
	43		18.07	22.20	26.60	31.31	36.38		15.37	15.66	15.99	16.35	16.74
ZX220BE	27	27.40	32.90	39.10	45.90	53.40	61.70	15.05	15.45	15.90	16.50	17.15	18.00
	32	25.70	30.80	36.50	42.80	49.80	57.50	16.40	16.85	17.35	17.90	18.55	19.35
	38		28.10	33.30	39.00	45.40	52.40		18.70	19.25	19.85	20.50	21.20
	43			30.60	35.80	41.60	48.00			21.10	21.70	22.30	23.10
ZX250BE	27	33.50	40.10	47.30	55.40	64.10	73.50	18.95	19.55	20.30	21.10	22.00	23.20
	32	31.30	37.40	44.10	51.50	59.60	68.40	20.70	21.40	22.10	22.90	23.90	25.00
	38		34.10	40.10	46.80	54.10	62.00		23.80	24.70	25.50	26.50	27.60
	43				42.70	49.30	56.50				28.00	29.00	30.10
ZX300BE	27	41.20	49.20	58.10	67.90	78.60	90.00	22.80	23.60	24.40	25.40	26.60	28.00
	32	38.50	45.90	54.10	63.20	73.00	83.70	24.90	25.80	26.70	27.70	28.90	30.30
	38		41.90	49.20	57.30	66.20	75.80		28.70	29.70	30.80	32.00	33.40
	43				52.30	60.30	69.10				33.80	35.00	36.40

Notes: Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZX Family: Medium temperature

Capacity and power (kW) at 50 Hz - PFJ/TFD

R407F

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-15	-10	-5	0	5	10	-15	-10	-5	0	5	10
ZX020BE ¹	27	3.63	4.32	5.07	5.79	6.45	7.24	1.55	1.67	1.76	1.87	1.99	2.06
	32	3.36	3.98	4.69	5.39	6.07	6.90	1.77	1.85	1.93	2.05	2.22	2.35
	38	2.79	3.35	4.02	4.74	5.46	6.35	2.11	2.18	2.27	2.44	2.70	2.92
	43	2.21	2.74	3.40	4.14	4.91		2.40	2.48	2.61	2.84	3.20	
ZX025BE ²	27	3.91	4.83	5.80	6.82	7.91	9.05	1.72	1.85	1.92	1.96	2.00	2.09
	32	3.63	4.45	5.35	6.35	7.44	8.63	1.97	2.05	2.10	2.15	2.23	2.38
	38	3.01	3.74	4.59	5.58	6.69	7.94	2.35	2.41	2.47	2.56	2.71	2.96
	43	2.39	3.06	3.88	4.87	6.03		2.67	2.74	2.83	2.98	3.22	
ZX030BE ¹	27	5.01	6.13	7.30	8.53	9.88	11.32	2.20	2.39	2.47	2.58	2.64	2.78
	32	4.64	5.65	6.75	7.94	9.31	10.79	2.44	2.63	2.67	2.77	2.97	3.16
	38	3.85	4.75	5.79	6.97	8.37	9.93	2.86	3.00	3.11	3.23	3.57	3.90
	43	3.06	3.88	4.89	6.09	7.53		3.11	3.28	3.43	3.49	4.03	
ZX040BE ¹	27	6.81	8.21	9.64	11.09	12.65	14.37	2.87	3.18	3.26	3.38	3.41	3.57
	32	6.31	7.57	8.91	10.33	11.91	13.70	3.18	3.49	3.53	3.64	3.84	4.06
	38	5.24	6.36	7.64	9.07	10.71	12.61	3.72	3.98	4.10	4.24	4.61	5.01
	43	4.16	5.20	6.46	7.92	9.64		4.04	4.36	4.53	4.59	5.21	
ZX050BE	27	8.11	10.02	11.73	13.53	15.71	18.56	3.62	3.70	3.92	4.20	4.46	4.62
	32	7.42	9.44	11.19	12.96	15.04	17.74	4.07	4.16	4.39	4.69	4.96	5.14
	38	6.32	8.44	10.22	11.95	13.91	16.41	4.61	4.71	4.95	5.26	5.54	5.73
	43	5.32	7.53	9.33	11.01	12.87		5.12	5.22	5.46	5.77	6.06	
ZX060BE	27	9.24	11.22	13.02	15.16	18.23	21.53	3.93	3.87	4.07	4.36	4.79	4.96
	32	8.46	10.57	12.42	14.51	17.45	20.57	4.50	4.48	4.62	5.00	5.38	5.57
	38	7.20	9.45	11.35	13.38	16.14	19.03	5.05	5.02	5.19	5.50	6.07	6.27
	43	6.07	8.44	10.36	12.33	14.93		5.56	5.51	5.66	5.98	6.44	
ZX075BE	27	10.07	12.23	14.19	16.52	19.68		4.32	4.22	4.39	4.65	5.08	
	32	9.23	11.52	13.53	15.82	18.85		4.92	4.89	5.04	5.47	5.81	
	38	7.85	10.31	12.37	14.59	17.43		5.68	5.64	5.80	6.16	6.74	
	43	6.62	9.20	11.29	13.45	16.12		6.38	6.29	6.46	6.81	7.28	
ZX076BE	27	10.28	12.48	14.48	16.85	20.08	23.72	4.44	4.31	4.43	4.64	5.08	5.26
	32	9.41	11.75	13.80	16.14	19.23	22.66	5.03	5.01	5.14	5.60	5.93	6.14
	38	8.01	10.51	12.62	14.88	17.78	20.96	5.97	5.94	6.07	6.44	7.08	7.34
	43	6.75	9.38	11.52	13.71	16.44		6.84	6.72	6.90	7.26	7.76	

Notes: ¹ Available in PFJ & TFD model

² Available in PFJ model only

Rating condition is based on a return gas temperature of 20°C

Power input includes condenser fan

ZX Family : Medium Temperature

Capacity and power (kW) at 50 Hz - PFJ/TFD

R448A/R449A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-15	-10	-5	0	5	10	-15	-10	-5	0	5	10
ZX020BE ¹	27	3.00	3.67	4.44	5.29	6.23	7.26	1.37	1.40	1.44	1.50	1.58	1.66
	32	2.78	3.42	4.14	4.94	5.82	6.79	1.56	1.58	1.62	1.68	1.76	1.84
	38	2.50	3.09	3.75	4.49	5.30	6.19	1.85	1.85	1.88	1.94	2.01	2.10
	43	2.25	2.80	3.41	4.09	4.84	5.67	2.15	2.13	2.15	2.19	2.26	2.35
ZX025BE ²	27	3.48	4.25	5.12	6.10	7.20	8.41	1.58	1.63	1.70	1.78	1.87	1.97
	32	3.28	4.01	4.84	5.77	6.81	7.96	1.76	1.81	1.88	1.96	2.05	2.16
	38	3.04	3.72	4.49	5.35	6.32	7.40	2.04	2.08	2.13	2.21	2.31	2.42
	43	2.82	3.46	4.18	5.00	5.91	6.92	2.32	2.34	2.39	2.46	2.55	2.66
ZX030BE ¹	27	4.41	5.36	6.44	7.63	8.95	10.40	1.96	2.04	2.12	2.22	2.33	2.46
	32	4.15	5.05	6.06	7.19	8.42	9.77	2.20	2.28	2.37	2.47	2.58	2.71
	38	3.83	4.66	5.59	6.62	7.76	9.01	2.53	2.62	2.72	2.82	2.93	3.06
	43		4.31	5.17	6.13	7.18	8.34		2.94	3.04	3.15	3.27	3.40
ZX040BE ¹	27	5.71	6.89	8.21	9.69	11.30	13.10	2.55	2.67	2.81	2.97	3.15	3.35
	32	5.40	6.51	7.76	9.15	10.70	12.35	2.88	3.00	3.15	3.31	3.49	3.70
	38	5.01	6.04	7.19	8.47	9.89	11.45	3.34	3.47	3.62	3.79	3.98	4.19
	43		5.63	6.70	7.90	9.21			3.93	4.08	4.25	4.44	
ZX050BE	27	7.71	9.35	11.15	13.20	15.50	18.05	3.27	3.38	3.50	3.66	3.84	4.07
	32	7.20	8.77	10.50	12.45	14.60	17.05	3.67	3.78	3.91	4.06	4.25	4.49
	38	6.58	8.06	9.68	11.50	13.55	15.80	4.20	4.32	4.45	4.61	4.81	5.05
	43	6.06	7.47	9.01	10.70	12.65	14.80	4.70	4.82	4.96	5.12	5.32	5.57
ZX060BE	27	8.88	10.75	12.80	15.10	17.65	20.50	3.79	3.93	4.09	4.29	4.53	4.83
	32	8.28	10.05	12.00	14.20	16.65	19.35	4.25	4.39	4.56	4.77	5.02	5.32
	38	7.55	9.24	11.10	13.10	15.40	17.90	4.87	5.02	5.20	5.41	5.67	5.98
	43		8.56	10.30	12.20	14.35			5.60	5.79	6.00	6.26	
ZX075BE	27	10.20	12.35	14.70	17.35	20.30	23.60	4.35	4.52	4.71	4.93	5.21	5.56
	32	9.52	11.55	13.85	16.35	19.15	22.30	4.89	5.06	5.25	5.49	5.77	6.13
	38	8.68	10.60	12.75	15.10	17.70	20.60	5.61	5.79	5.99	6.23	6.53	6.89
	43		9.84	11.85	14.05	16.50			6.46	6.67	6.92	7.22	
ZX076BE	27	10.25	12.45	14.85	17.50	20.50	23.90	4.31	4.46	4.64	4.86	5.13	5.46
	32	9.58	11.65	13.95	16.45	19.30	22.50	4.84	5.00	5.18	5.41	5.68	6.02
	38	8.74	10.70	12.85	15.20	17.85	20.80	5.55	5.72	5.91	6.15	6.43	6.78
	43		9.92	11.95	14.15	16.65	19.45		6.39	6.59	6.83	7.12	7.47

Notes: ¹ Available in PFJ & TFD model

² Available in PFJ model only

Rating condition is based on a return gas temperature of 20°C

Power input includes condenser fan

ZXD Family : Medium Temperature

Capacity and power (kW) at 50 Hz - TFD

R404A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD030BE	27	3.95	4.72	5.61	6.60	7.69	8.83	1.90	1.99	2.09	2.19	2.29	2.38
	32	3.67	4.42	5.26	6.19	7.18	8.21	2.07	2.18	2.29	2.40	2.51	2.61
	38	3.34	4.05	4.82	5.65	6.51	7.40	2.31	2.44	2.57	2.69	2.80	2.90
	43	3.03	3.70	4.40	5.14	5.88	6.65	2.53	2.68	2.82	2.95	3.06	3.17
ZXD040BE	27	5.64	6.78	8.08	9.53	11.15	12.95	2.68	2.80	2.89	2.99	3.09	3.23
	32	5.27	6.33	7.53	8.88	10.40	12.05	2.91	3.05	3.16	3.27	3.38	3.51
	38	4.80	5.76	6.84	8.04	9.39	10.90	3.24	3.41	3.55	3.67	3.79	3.92
	43	4.39	5.25	6.22	7.31	8.53	9.89	3.60	3.80	3.95	4.09	4.22	4.35
ZXD050BE	27	6.87	8.25	9.80	11.55	13.40	15.50	3.27	3.47	3.66	3.86	4.06	4.25
	32	6.43	7.72	9.16	10.75	12.50	14.40	3.53	3.74	3.95	4.16	4.38	4.58
	38	5.89	7.05	8.35	9.78	11.35	13.05	3.87	4.10	4.33	4.56	4.78	5.01
	43	5.43	6.47	7.63	8.92	10.35	11.85	4.20	4.44	4.68	4.92	5.16	5.39
ZXD060BE	27	8.04	9.63	11.40	13.35	15.50	17.75	3.93	4.18	4.44	4.70	4.96	5.22
	32	7.52	8.99	10.65	12.45	14.40	16.50	4.24	4.51	4.78	5.06	5.34	5.62
	38	6.87	8.19	9.66	11.25	13.00	14.90	4.66	4.95	5.24	5.54	5.84	6.13
	43	6.32	7.50	8.80	10.25	11.80	13.45	5.07	5.37	5.67	5.98	6.29	6.60
ZXD075BE	27	8.98	10.75	12.70	14.85	17.20	19.70	4.33	4.62	4.91	5.21	5.51	5.81
	32	8.39	10.00	11.85	13.80	15.95	18.25	4.68	4.98	5.29	5.61	5.93	6.25
	38	7.66	9.12	10.75	12.50	14.40	16.45	5.15	5.47	5.80	6.14	6.48	6.81
	43	7.04	8.34	9.77	11.35	13.00	14.85	5.59	5.93	6.28	6.63	6.98	7.33
ZXD076BE	27	9.02	10.80	12.80	14.95	17.35	19.90	4.31	4.59	4.87	5.16	5.45	5.74
	32	8.43	10.10	11.90	13.95	16.10	18.45	4.65	4.95	5.25	5.56	5.87	6.18
	38	7.71	9.19	10.85	12.60	14.55	16.65	5.11	5.43	5.75	6.08	6.41	6.74
	43	7.09	8.41	9.87	11.45	13.20	15.05	5.56	5.89	6.23	6.57	6.91	7.26
ZXD090BE	27	10.70	12.60	14.70	17.05	19.60		5.52	5.85	6.20	6.57	6.95	
	32	10.45	12.30	14.35	16.65	19.10		6.07	6.44	6.82	7.22	7.64	
	38	10.10	11.90	13.85	16.05	18.40		6.84	7.26	7.69	8.14	8.60	
	43	9.82	11.50	13.40	15.50	17.75		7.61	8.08	8.56	9.05	9.56	

Notes: Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZXD Family : Medium Temperature

R404A

Capacity and power (kW) at 50 Hz - TFM

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD120BE	27	16.25	19.50	23.20	27.20	31.70		8.06	8.40	8.75	9.11	9.48	
	32	15.15	18.15	21.60	25.30	29.40		8.82	9.19	9.56	9.94	10.30	
	38	13.75	16.50	19.55	22.90	26.60		9.86	10.25	10.65	11.05	11.45	
	43	12.55	15.00	17.75	20.80	24.10		10.85	11.25	11.65	12.05	12.50	
ZXD160BE	27	21.50	24.90	28.50	32.20	36.10		10.10	10.70	11.30	11.90	12.50	
	32	20.70	24.20	27.80	31.70	35.70		11.10	11.75	12.40	13.05	13.70	
	38	19.80	23.20	26.80	30.70	34.70		12.30	13.05	13.80	14.55	15.35	
	43	18.65	21.90	25.30	29.00	33.00		13.55	14.35	15.25	16.10	17.00	
ZXD200BE	27	26.60	31.40	36.60	42.40			11.60	12.30	13.05	13.80		
	32	26.00	30.60	35.70	41.40			12.70	13.45	14.25	15.10		
	38	25.20	29.60	34.50	39.90			14.25	15.10	16.00	16.95		
	43	24.50	28.70	33.40	38.60			15.75	16.75	17.75	18.75		

Notes: Rating condition is based on a return gas temperature of 20°C
 Power input includes condenser fan

ZXD Family : Medium Temperature

Capacity and power (kW) at 50 Hz - TFD

R407F

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030BE	27	5.70	6.64	7.48	8.63	10.52	11.57	2.20	2.33	2.61	2.87	2.93	2.86
	32	5.31	6.35	7.24	8.40	10.25	11.27	2.42	2.53	2.79	3.01	3.02	2.92
	38	4.72	5.84	6.75	7.88	9.64	10.62	2.79	2.90	3.14	3.33	3.30	3.19
	43		5.45	6.35					3.23	3.47			
ZXD040BE	27	7.68	9.32	11.17	13.20	15.41	16.34	2.85	3.04	3.23	3.40	3.49	3.50
	32	7.30	8.93	10.73	12.69	14.77	15.64	3.13	3.30	3.50	3.70	3.86	3.90
	38	6.66	8.27	10.01	11.85	13.77	14.56	3.53	3.66	3.86	4.09	4.31	4.39
	43	6.06	7.64	9.30	11.03	12.81	13.53	3.95	4.04	4.22	4.46	4.72	4.83
ZXD050BE	27	9.52	11.65	13.94	16.37	19.26	20.42	3.61	3.77	3.94	4.08	4.20	4.21
	32	9.05	11.21	13.52	15.73	18.47	19.56	3.97	4.11	4.30	4.45	4.64	4.70
	38	8.11	10.33	12.69	14.81	17.35	18.37	4.40	4.54	4.77	4.95	5.23	5.33
	43	7.45	9.47	11.72	13.90	16.40	17.40	4.98	4.98	5.19	5.45	5.82	5.97
ZXD060BE	27	10.37	12.69	15.70	18.80	22.69	24.24	3.80	4.18	4.49	4.58	4.62	4.86
	32	9.85	12.20	15.23	17.91	21.39	22.78	4.33	4.74	5.15	5.11	5.14	5.40
	38	9.07	11.50	14.19	16.64	19.76	21.01	4.81	5.27	5.65	5.64	5.75	6.03
	43	8.41	10.59	12.99	15.41	18.34	19.52	5.40	5.72	5.99	6.06	6.26	6.54
ZXD075BE	27	12.99	15.24	17.78	20.67			4.92	5.09	5.19	5.28		
	32	12.35	14.49	16.87	19.56			5.61	5.71	5.83	5.86		
	38	11.35	13.34	15.51	17.92			6.22	6.19	6.30	6.37		
	43		12.30	14.28	16.44				6.73	6.72	6.78		
ZXD076BE	27	13.25	15.54	18.13	21.09	24.47	25.82	4.82	4.98	5.09	5.18	5.14	5.33
	32	12.59	14.78	17.21	19.96	23.07	24.32	5.50	5.59	5.71	5.74	5.71	5.94
	38	11.57	13.60	15.82	18.28	21.06	22.17	6.10	6.07	6.17	6.24	6.31	6.56
	43	10.67	12.55	14.57	16.77	19.23	20.22	6.80	6.60	6.58	6.65	6.75	6.98

Notes: Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZXD Family : Medium Temperature

Capacity and power (kW) at 50 Hz - TFD

R448A/R449A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-15	-10	-5	0	5	10	-15	-10	-5	0	5	10
ZXD030BE	27	4.53	5.42	6.41	7.53	8.81		1.87	1.98	2.07	2.18	2.31	
	32	4.30	5.15	6.07	7.12	8.32		2.03	2.15	2.26	2.38	2.52	
	38	3.99	4.77	5.63	6.59	7.69		2.24	2.39	2.51	2.64	2.79	
	43	3.68	4.41	5.21	6.11	7.14		2.43	2.59	2.73	2.88	3.04	
ZXD040BE	27	6.19	7.53	9.06	10.75	12.70	14.80	2.38	2.48	2.58	2.70	2.86	3.06
	32	5.84	7.12	8.57	10.20	12.00	14.00	2.64	2.76	2.88	3.01	3.16	3.36
	38	5.39	6.60	7.95	9.46	11.15	13.00	2.98	3.15	3.31	3.45	3.62	3.81
	43	4.99	6.12	7.39	8.80	10.40	12.10	3.29	3.51	3.71	3.89	4.07	4.27
ZXD050BE	27	7.56	9.15	10.95	12.95	15.20	17.70	3.14	3.36	3.58	3.82	4.08	4.36
	32	7.15	8.65	10.35	12.25	14.40	16.75	3.43	3.66	3.90	4.15	4.42	4.70
	38	6.62	8.02	9.61	11.40	13.35	15.55	3.81	4.05	4.31	4.57	4.85	5.15
	43	6.16	7.48	8.96	10.65	12.50	14.55	4.16	4.42	4.68	4.96	5.25	5.56
ZXD060BE	27	8.85	10.65	12.75	15.00	17.55	20.30	3.80	4.08	4.38	4.70	5.04	5.41
	32	8.35	10.10	12.00	14.20	16.60	19.20	4.15	4.45	4.76	5.10	5.45	5.83
	38	7.72	9.33	11.15	13.15	15.35	17.80	4.62	4.94	5.27	5.62	5.99	6.39
	43		8.67	10.35	12.25	14.30			5.38	5.73	6.09	6.48	
ZXD075BE	27	9.99	12.05	14.40	17.00	19.90	23.10	4.11	4.38	4.68	5.00	5.36	5.78
	32	9.43	11.40	13.60	16.05	18.80	21.80	4.51	4.81	5.12	5.45	5.82	6.22
	38	8.72	10.55	12.60	14.90	17.45	20.20	5.03	5.38	5.73	6.07	6.45	6.85
	43		9.81	11.75	13.85	16.25			5.90	6.28	6.65	7.04	
ZXD076BE	27	10.05	12.15	14.50	17.15	20.10	23.30	4.08	4.34	4.63	4.94	5.30	5.71
	32	9.48	11.45	13.70	16.20	18.95	22.00	4.48	4.77	5.07	5.39	5.74	6.14
	38	8.77	10.60	12.70	15.00	17.60	20.40	5.00	5.34	5.67	6.00	6.36	6.76
	43		9.88	11.85	14.00	16.40	19.10		5.85	6.22	6.58	6.95	7.35

Notes: Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZXD Family : Medium Temperature

Capacity and power (kW) at 50 Hz - TFM

R448A/R449A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD120BE	27	14.50	17.95	21.90	26.20	31.20		7.34	7.56	7.80	8.08	8.41	
	32	13.55	16.90	20.60	24.70	29.40		8.25	8.48	8.73	9.01	9.35	
	38	12.30	15.50	18.95	22.80	27.10		9.45	9.70	9.96	10.25	10.60	
	43	11.15	14.20	17.50	21.10	25.10		10.55	10.80	11.10	11.40	11.70	
ZXD160BE	27	18.50	22.10	26.00	30.40	35.20		8.41	9.05	9.70	10.35	10.90	
	32	18.10	21.50	25.30	29.60	34.20		9.28	9.97	10.65	11.30	11.90	
	38	17.45	20.70	24.40	28.50	33.00		10.50	11.25	12.00	12.70	13.35	
	43	16.90	20.00	23.60	27.50	31.80		11.65	12.50	13.30	14.05	14.75	
ZXD200BE	27	23.80	27.90	32.20	36.60			10.85	11.75	12.65	13.60		
	32	23.00	27.00	31.10	35.30			12.00	13.00	14.00	15.05		
	38	22.10	25.80	29.60	33.50			13.55	14.70	15.85	17.00		
	43	21.20	24.70	28.30	32.00			14.95	16.25	17.55	18.85		

Notes: Rating condition is based on a return gas temperature of 20°C
 Power input includes condenser fan

ZXL Family : Low Temperature

Capacity and power (kW) at 50 Hz - PFJ/TFD

R404A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXL020BE ¹	27	1.42	1.95	2.49	3.05	3.67	4.35	1.40	1.49	1.58	1.66	1.73	1.80
	32	1.38	1.87	2.38	2.91	3.50	4.15	1.53	1.64	1.74	1.83	1.91	1.99
	38	1.28	1.74	2.22	2.72	3.27	3.89	1.73	1.86	1.97	2.08	2.17	2.26
	43	1.19	1.62	2.07	2.55	3.08	3.66	1.94	2.08	2.20	2.32	2.43	2.53
ZXL025BE ¹	27	1.82	2.26	2.80	3.44	4.18	5.01	1.55	1.65	1.74	1.83	1.91	1.98
	32	1.79	2.21	2.72	3.33	4.03	4.81	1.78	1.88	1.97	2.06	2.14	2.22
	38	1.83	2.20	2.67	3.22	3.86	4.57	2.05	2.16	2.26	2.36	2.45	2.53
	43	1.82	2.15	2.57	3.07	3.64	4.28	2.30	2.42	2.54	2.65	2.75	2.85
ZXL030BE ¹	27	2.43	2.68	3.19	3.90	4.78	5.76	1.63	1.74	1.86	1.97	2.09	2.22
	32	2.34	2.58	3.06	3.73	4.55	5.46	1.90	2.03	2.13	2.23	2.33	2.44
	38	2.34	2.55	2.98	3.59	4.32	5.12	2.16	2.31	2.44	2.55	2.66	2.79
	43	2.31	2.51	2.89	3.42	4.06	4.75	2.48	2.67	2.83	2.98	3.13	3.29
ZXL035BE	27	2.63	3.33	4.09	4.94	5.89	6.97	2.19	2.28	2.38	2.50	2.62	2.74
	32	2.52	3.19	3.92	4.73	5.64	6.66	2.46	2.54	2.65	2.77	2.89	3.03
	38	2.39	3.01	3.69	4.44	5.29	6.26	2.82	2.91	3.02	3.14	3.28	3.43
	43	2.29	2.87	3.50	4.21	5.01	5.92	3.18	3.28	3.40	3.54	3.69	3.86
ZXL040BE	27	3.30	4.10	5.04	6.11	7.31	8.63	2.58	2.73	2.91	3.10	3.31	3.53
	32	3.19	3.96	4.85	5.87	7.01	8.24	2.86	3.01	3.19	3.40	3.63	3.88
	38	3.06	3.79	4.63	5.57	6.61	7.73	3.24	3.40	3.60	3.84	4.10	4.38
	43	2.98	3.66	4.44	5.31	6.26	7.28	3.64	3.82	4.04	4.30	4.60	4.92
ZXL050BE	27	4.58	5.06	5.82	6.87	8.19	9.75	2.69	2.97	3.21	3.43	3.62	3.79
	32	4.20	4.81	5.66	6.73	8.02	9.47	3.14	3.37	3.58	3.77	3.95	4.14
	38	3.73	4.46	5.37	6.43	7.63	8.93	3.81	4.01	4.20	4.39	4.58	4.78
	43	3.39	4.18	5.10	6.11	7.21	8.36	4.36	4.56	4.75	4.94	5.15	5.37
ZXL060BE	27	4.79	6.08	7.47	8.97	10.55	12.25	3.63	3.83	4.07	4.34	4.63	4.94
	32	4.52	5.75	7.12	8.60	10.20	11.90	4.00	4.22	4.48	4.77	5.08	5.41
	38	4.40	5.52	6.78	8.18	9.71	11.35	4.43	4.68	4.98	5.30	5.65	6.03
	43	4.22	5.19	6.32	7.60	9.01	10.55	4.87	5.16	5.49	5.85	6.25	6.68
ZXL075BE	27	5.22	6.51	7.95	9.55	11.30	13.25	4.09	4.44	4.77	5.10	5.43	5.77
	32	5.04	6.26	7.61	9.10	10.75	12.50	4.52	4.88	5.22	5.57	5.93	6.31
	38	4.65	5.88	7.08	8.41	9.86	11.45	5.22	5.52	5.87	6.24	6.63	7.04
	43	4.36	5.29	6.54	7.71	8.99	10.40	5.88	6.22	6.52	6.90	7.30	7.74

Notes: ¹ Available in PFJ & TFD model
 Rating condition is based on a return gas temperature of 20°C
 Power input includes condenser fan

ZXL Family : Low Temperature

Capacity and power (kW) at 50 Hz - TFM

R404A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXL100BE	27	9.06	10.71	12.84	15.37	18.26	21.40	6.02	6.47	6.91	7.34	7.80	8.26
	32	8.84	10.46	12.53	15.00	17.79	20.84	6.53	7.01	7.49	7.96	8.44	8.95
	38	8.52	10.10	12.12	14.52	17.20	20.13	7.21	7.73	8.25	8.78	9.31	9.87
	43	8.20	9.77	11.74	14.07	16.69	19.51	7.85	8.41	8.96	9.52	10.11	10.70
ZXL130BE	27	10.99	12.97	15.54	18.59	22.05	25.80	7.27	7.84	8.41	8.98	9.58	10.21
	32	10.71	12.66	15.16	18.13	21.47	25.10	7.90	8.52	9.14	9.76	10.40	11.08
	38	10.30	12.21	14.64	17.52	20.74	24.21	8.75	9.42	10.09	10.79	11.49	12.23
	43	9.91	11.79	14.17	16.97	20.09	23.44	9.55	10.27	10.99	11.73	12.49	13.29
ZXL150BE	27	12.51	14.78	17.71	21.21	25.16		8.35	8.99	9.62	10.25	10.90	
	32	12.20	14.42	17.28	20.69	24.53		9.06	9.75	10.44	11.13	11.84	
	38	11.75	13.93	16.71	20.00	23.71		10.04	10.80	11.54	12.29	13.08	
	43	11.31	13.47	16.19	19.40	22.98		10.95	11.76	12.57	13.38	14.21	
ZXL200BE	27	14.60	17.24	20.65	24.69	29.28		10.08	10.90	11.71	12.53	13.38	
	32	14.23	16.81	20.14	24.07	28.50		10.98	11.86	12.74	13.63	14.55	
	38	13.68	16.22	19.46	23.27	27.53		12.19	13.15	14.12	15.10	16.11	
	43	13.15	15.65	18.81	22.53	26.67		13.33	14.36	15.40	16.45	17.55	
ZXL250BE	27	18.25	21.80	26.30	31.60	37.80	44.90	13.60	14.40	15.20	16.15	17.20	18.40
	32	17.75	21.40	25.80	30.90	36.70	43.40	14.90	15.75	16.70	17.70	18.75	19.95
	38	16.80	20.70	25.00	29.90	35.30	41.40	16.70	17.70	18.75	19.80	20.90	22.20
	43		19.70	24.10	28.80	34.00	39.70		19.55	20.70	21.90	23.10	24.30
ZXL300BE	27	23.00	27.50	33.00	39.70	47.50	56.40	16.50	17.45	18.50	19.65	21.00	22.40
	32	22.30	27.00	32.50	38.80	46.10	54.40	18.05	19.15	20.30	21.50	22.90	24.40
	38	21.10	26.00	31.40	37.50	44.40	51.90	20.20	21.50	22.80	24.20	25.60	27.10
	43			30.20	36.20	42.70	49.70			25.20	26.70	28.20	29.80

Notes: Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZXL Family : Low Temperature

Capacity and power (kW) at 50 Hz - PFJ/TFD

R407F

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXL020BE ¹	27	1.32	1.68	2.15	2.72	3.37	4.10	1.69	1.76	1.82	1.86	1.90	1.94
	32	1.25	1.59	2.04	2.59	3.22	3.91	1.74	1.83	1.90	1.96	2.01	2.06
	38	1.14	1.47	1.91	2.43	3.04	3.71	1.80	1.93	2.03	2.12	2.20	2.27
	43	1.06	1.38	1.81	2.33	2.92	3.57	2.02	2.19	2.34	2.46	2.57	2.68
ZXL025BE ¹	27	1.58	2.05	2.64	3.38	4.18	5.11	2.06	2.15	2.18	2.23	2.24	2.28
	32	1.49	1.94	2.51	3.22	3.99	4.88	2.07	2.18	2.27	2.33	2.34	2.42
	38	1.36	1.80	2.35	3.03	3.77	4.62	2.08	2.17	2.34	2.48	2.56	2.71
	43	1.26	1.69	2.23	2.90	3.62	4.46	2.49	2.46	2.63	2.86	3.02	3.27
ZXL030BE ¹	27	1.85	2.36	2.99	3.72	4.56	5.57	2.23	2.43	2.49	2.52	2.57	2.53
	32	1.75	2.24	2.84	3.54	4.35	5.32	2.24	2.46	2.59	2.64	2.69	2.69
	38	1.60	2.07	2.65	3.33	4.11	5.04	2.26	2.45	2.67	2.81	2.94	3.01
	43	1.48	1.94	2.52	3.19	3.95	4.86	2.70	2.78	3.00	3.24	3.46	3.64
ZXL035BE	27	2.57	3.21	4.02	4.84	5.75	6.78	2.31	2.30	2.42	2.58	2.82	3.05
	32	2.52	3.16	3.92	4.69	5.54	6.51	2.65	2.63	2.74	2.90	3.15	3.39
	38	2.37	3.01	3.69	4.42	5.18	6.08	3.07	3.09	3.19	3.37	3.63	3.90
	43	2.28	2.87	3.51	4.17	4.89	5.73	3.54	3.56	3.68	3.87	4.17	4.48
ZXL040BE	27	3.06	3.87	4.80	5.83	7.00	8.30	2.74	2.85	3.03	3.26	3.54	3.85
	32	2.93	3.72	4.60	5.59	6.70	7.94	3.08	3.19	3.38	3.63	3.93	4.26
	38	2.73	3.47	4.30	5.23	6.26	7.42	3.53	3.68	3.90	4.19	4.52	4.90
	43	2.56	3.26	4.04	4.90	5.86	6.94	3.98	4.17	4.44	4.77	5.16	5.58
ZXL050BE	27	3.50	4.25	5.33	6.70	8.28	9.99	2.95	3.13	3.28	3.45	3.63	3.94
	32	3.23	3.97	5.04	6.36	7.87	9.51	3.39	3.56	3.72	3.87	4.05	4.36
	38	2.90	3.62	4.67	5.96	7.40	8.94	4.23	4.35	4.47	4.61	4.79	5.06
	43	2.69	3.38	4.42	5.68	7.08	8.55	4.99	4.98	5.09	5.22	5.51	5.85
ZXL060BE	27	4.14	5.11	6.38	7.89	9.61	11.43	3.65	3.81	3.95	4.15	4.39	4.71
	32	3.94	4.90	6.17	7.68	9.38	11.22	4.20	4.36	4.52	4.72	4.98	5.31
	38	3.60	4.52	5.74	7.22	8.88	10.69	4.97	5.13	5.29	5.49	5.75	6.09
	43	3.33	4.18	5.34	6.75	8.36	10.11	5.67	5.81	5.95	6.14	6.40	6.74
ZXL075BE	27	4.60	5.69	7.08	8.73	10.61	12.66	3.97	4.17	4.37	4.61	4.91	5.30
	32	4.36	5.44	6.80	8.41	10.22	12.21	4.53	4.73	4.93	5.17	5.48	5.88
	38	3.98	5.05	6.38	7.94	9.70	11.60	5.38	5.57	5.77	6.00	6.30	6.70
	43	3.68	4.75	6.06	7.59	9.30	11.14	6.15	6.32	6.50	6.72	7.01	7.40

Notes: ¹ Available in PFJ & TFD model
Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZXL Family : Low Temperature

Capacity and power (kW) at 50 Hz - PFJ/TFD

R448A/R449A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXL020BE ¹	27	1.12	1.52	2.00	2.54	3.17	3.87	1.14	1.24	1.33	1.40	1.48	1.54
	32	1.07	1.46	1.92	2.45	3.05	3.72	1.27	1.38	1.48	1.57	1.64	1.71
	38	0.99	1.36	1.80	2.30	2.87	3.50	1.45	1.58	1.70	1.80	1.89	1.96
	43	0.92	1.28	1.68	2.16	2.69	3.29	1.64	1.79	1.92	2.03	2.13	2.21
ZXL025BE ¹	27	1.32	1.78	2.34	2.99	3.73	4.56	1.30	1.44	1.54	1.62	1.70	1.76
	32	1.26	1.71	2.25	2.88	3.59	4.38	1.46	1.60	1.72	1.82	1.90	1.96
	38	1.17	1.60	2.12	2.71	3.38	4.13	1.68	1.84	1.98	2.10	2.19	2.26
	43	1.08	1.50	1.98	2.55	3.18	3.89	1.88	2.08	2.23	2.36	2.46	2.54
ZXL030BE ¹	27	1.66	2.14	2.69	3.33	4.08	4.95	1.44	1.54	1.64	1.72	1.80	1.87
	32	1.60	2.06	2.59	3.21	3.93	4.76	1.62	1.74	1.85	1.94	2.02	2.10
	38	1.50	1.94	2.45	3.04	3.72	4.51	1.88	2.02	2.15	2.25	2.34	2.42
	43	1.42	1.84	2.32	2.88	3.52	4.27	2.13	2.29	2.43	2.55	2.65	2.73
ZXL035BE	27	2.05	2.64	3.33	4.12	5.05	6.12	1.74	1.89	2.01	2.12	2.22	2.31
	32	1.97	2.54	3.20	3.97	4.86	5.88	1.98	2.14	2.28	2.40	2.50	2.59
	38	1.86	2.41	3.03	3.76	4.60	5.56	2.31	2.50	2.65	2.78	2.90	2.99
	43	1.75	2.27	2.87	3.56	4.35	5.26	2.63	2.84	3.02	3.16	3.28	3.38
ZXL040BE	27	2.58	3.31	4.19	5.19	6.34	7.62	2.05	2.26	2.46	2.64	2.82	2.99
	32	2.49	3.20	4.02	4.98	6.06	7.26	2.29	2.53	2.75	2.95	3.14	3.33
	38	2.37	3.04	3.81	4.69	5.68	6.79	2.63	2.91	3.16	3.38	3.59	3.79
	43	2.28	2.90	3.61	4.43	5.34	6.36	2.96	3.27	3.55	3.80	4.03	4.24
ZXL050BE	27	2.94	3.79	4.80	5.98	7.34	8.87	2.34	2.55	2.75	2.92	3.09	3.25
	32	2.84	3.66	4.63	5.75	7.04	8.49	2.60	2.84	3.05	3.25	3.42	3.59
	38	2.72	3.49	4.40	5.44	6.64	7.98	2.97	3.24	3.48	3.70	3.89	4.07
	43	2.61	3.34	4.19	5.16	6.27	7.52	3.32	3.63	3.90	4.13	4.34	4.53
ZXL060BE	27	3.74	4.80	6.03	7.45	9.08	10.95	2.90	3.20	3.49	3.76	4.03	4.29
	32	3.62	4.63	5.81	7.15	8.70	10.45	3.22	3.55	3.86	4.15	4.43	4.70
	38	3.43	4.36	5.44	6.68	8.10	9.71	3.69	4.05	4.38	4.69	4.99	5.27
	43	3.23	4.08	5.06	6.19	7.49	8.97	4.16	4.54	4.89	5.22	5.52	5.81
ZXL075BE	27	4.09	5.24	6.58	8.11	9.86	11.85	3.18	3.55	3.89	4.21	4.51	4.81
	32	3.95	5.05	6.31	7.75	9.40	11.25	3.56	3.95	4.31	4.64	4.96	5.28
	38	3.73	4.74	5.88	7.20	8.69	10.40	4.17	4.58	4.95	5.31	5.64	5.97
	43	3.51	4.40	5.44	6.62	7.98	9.51	4.83	5.25	5.63	5.99	6.34	6.67

Notes: ¹ Available in PFJ & TFD model
 Rating condition is based on a return gas temperature of 20°C
 Power input includes condenser fan

ZXLD Family : Low Temperature

Capacity and power (kW) at 50 Hz - TFD/TFM

R404A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXLD090BE	27	5.43	6.78	8.30	9.98	11.80	13.80	4.35	4.68	5.01	5.35	5.70	6.05
	32	5.34	6.63	8.08	9.69	11.45	13.35	4.64	5.04	5.43	5.81	6.20	6.59
	38	5.29	6.47	7.83	9.34	11.00	12.80	5.00	5.49	5.96	6.43	6.88	7.32
	43	5.29	6.38	7.65	9.07	10.65	12.35	5.31	5.89	6.44	6.98	7.50	8.00
ZXLD120BE	27	9.63	12.20	15.00	18.00	21.20	24.50	7.46	7.86	8.34	8.86	9.43	10.05
	32	9.05	11.50	14.25	17.20	20.40	23.80	8.20	8.64	9.15	9.71	10.30	10.95
	38	8.81	11.05	13.60	16.40	19.45	22.70	9.07	9.56	10.15	10.75	11.45	12.20
	43	8.46	10.40	12.70	15.25	18.10	21.20	9.94	10.50	11.15	11.85	12.65	13.45
ZXLD160BE	27	12.85	15.70	18.90	22.50	26.30	30.40	8.56	9.40	10.30	11.20	12.15	13.10
	32	12.65	15.40	18.45	21.80	25.50	29.40	9.22	10.25	11.25	12.30	13.35	14.45
	38	12.60	15.10	17.90	21.10	24.50	28.20	10.05	11.30	12.50	13.75	15.00	16.20
	43	12.65	14.95	17.55	20.50	23.70	27.10	10.75	12.20	13.65	15.05	16.50	17.90
ZXLD200BE	27	13.95	17.30	21.00	25.10	29.60	34.40	9.63	10.40	11.20	12.05	12.85	13.70
	32	13.75	16.90	20.50	24.40	28.70	33.30	10.30	11.25	12.20	13.10	14.05	15.00
	38	13.65	16.55	19.85	23.50	27.60	32.00	11.15	12.30	13.45	14.55	15.65	16.75
	43	13.65	16.30	19.40	22.90	26.70	30.80	11.85	13.25	14.55	15.85	17.10	18.35

Notes: Rating condition is based on a return gas temperature of 20°C
Power input includes condenser fan

ZXLD Family : Low Temperature

Capacity and power (kW) at 50 Hz - TFM

R448A/R449A

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXLD120BE	27	7.94	10.05	12.45	15.20	18.30	21.70	6.03	6.44	6.93	7.51	8.15	8.83
	32	7.88	9.89	12.20	14.85	17.80	21.10	6.61	7.09	7.66	8.31	9.00	9.73
	38	7.75	9.65	11.85	14.35	17.15	20.30	7.43	8.01	8.68	9.41	10.20	11.00
	43	7.61	9.41	11.50	13.85	16.55	19.55	8.23	8.91	9.67	10.50	11.35	12.25
ZXLD160BE	27	9.95	12.65	15.70	19.15	22.80	26.60	6.96	7.69	8.49	9.35	10.25	11.25
	32	9.74	12.30	15.30	18.55	22.00	25.70	7.59	8.46	9.38	10.35	11.40	12.50
	38	9.47	11.90	14.70	17.75	21.00	24.40	8.35	9.41	10.50	11.65	12.90	14.10
	43	9.28	11.60	14.20	17.10	20.20	23.40	8.95	10.20	11.50	12.85	14.20	15.60
ZXLD200BE	27	10.85	13.85	17.25	21.00	25.10	29.50	7.68	8.41	9.20	10.05	10.95	11.85
	32	10.65	13.50	16.80	20.40	24.40	28.50	8.37	9.24	10.15	11.10	12.10	13.15
	38	10.35	13.05	16.15	19.60	23.30	27.20	9.20	10.25	11.35	12.50	13.65	14.85
	43	10.15	12.70	15.65	18.90	22.40	26.10	9.87	11.15	12.45	13.75	15.05	16.40

Notes: Rating condition is based on a return gas temperature of 20°C
 Power input includes condenser fan

ZX Family: Medium temperature

Technical data at 50 Hz - PFJ

Family				ZX			
Nominal Rating	Horsepower	HP		2	2.5	3	4
Model Name				ZX020BE	ZX025BE	ZX030BE	ZX040BE
Performance	Sound Pressure Level	@1m	dB(A)	56			
Compressor	Rated Load Ampere	R404A	Amp	13.2	14.6	16.4	20.0
		R407F	Amp	13.2	14.6	16.4	20.0
	Locked Rotor Ampere	R404A	Amp	58.0	61.0	82.0	114.0
		R407F	Amp	58.0	61.0	82.0	114.0
	Oil Type	R404A	POE				
	R407F	POE					
	Oil Recharge Volume	R404A/R407F		1.18	1.33	1.33	1.33
Fan Motor	Number of Fan		Pieces	1	1	1	1
	Diameter		mm	450	450	450	450
	Fan Speed		rpm	933	933	933	933
	Air Flow	Total	m ³ /h	3483	3483	3483	3483
	Total Fan Motor Power	Input	W	116	116	116	116
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5
	Receiver Volume	R404A	kg	4.4	4.4	4.4	4.4
		R407F	kg	4.5	4.5	4.5	4.5
	Pipes	Suction OD	Inch	3/4	3/4	3/4	3/4
		Liquid OD	Inch	1/2	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 840			
Weight	Net	kg	76	79	79	100	
	Gross	kg	114	117	117	138	

ZX Family: Medium temperature

Technical data at 50 Hz - TFD

Family				ZX						
Nominal Rating	Horsepower	HP		2	3	4	5	6	7.5	7.6
Model Name				ZX020BE	ZX030BE	ZX040BE	ZX050BE	ZX060BE	ZX075BE	ZX076BE
Performance	Sound Pressure Level	@1m	dB(A)	56			60			
Compressor	Rated Load Ampere	R404A	Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8
		R407F	Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8
	Locked Rotor Ampere	R404A	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0
		R407F	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0
	Oil Type	R404A	POE							
	R407F	POE								
	Oil Recharge Volume	R404A/R407F		1.18	1.33	1.83	1.83	1.66	1.66	1.66
Fan Motor	Number of Fan		Pieces	1	1	1	2	2	2	2
	Diameter		mm	450	450	450	450	450	450	450
	Fan Speed		rpm	830	830	830	830	830	830	830
	Air Flow	Total	m ³ /h	2922	2922	2922	5910	5910	5910	5910
	Total Fan Motor Power	Input	W	116	116	116	246	246	246	246
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	Receiver Volume	R404A	kg	4.4	4.4	4.4	6.3	6.3	6.3	6.3
		R407F	kg	4.5	4.5	4.5	6.4	6.4	6.4	6.4
	Pipes	Suction OD	Inch	3/4	3/4	7/8	7/8	7/8	7/8	7/8
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 840			1029 x 424 x 1242			
Weight	Net	kg	76	79	100	108	112	118	121	
	Gross	kg	114	117	121	152	156	162	154	

ZX Family: Medium temperature

Technical data at 50 Hz - TFM, TWM

Family				ZX							
Nominal Rating	Horsepower	HP		9	10	13	15	22	25	30	
Model Name				ZX090BE	ZX100BE	ZX130BE	ZX150BE	ZX220BE	ZX250BE	ZX300BE	
Performance	Sound Pressure Level	@1m	dB(A)	66	66	67	67	73	73	74	
Compressor	Rated Load Ampere		Amp	17.5	20.0	25.0	27.9	31.4	41.4	57.9	
	Locked Rotor Ampere		Amp	111	118	140	174	225	272	310	
	Oil Type			POE							
	Oil Recharge Volume			3.14				4.38	6.51	6.00	
Fan Motor	Number of Fan		Pieces	1				2			
	Diameter		mm	710				710			
	Maximum Speed		rpm	1010				1010			
	Air Flow	Total	m ³ /h	16632	16632	15372	15372	29592	29592	25200	
	Total Fan Motor Power	Input	W	855	855	980	980	2300	2300	2600	
Others	Oil Separator	Volume	Liters	0.6							
	Receiver Volume	R404A	kg	17				31.8			
	Pipes	Suction OD	Inch	1 3/8				1 5/8	2 1/8		
		Liquid OD	Inch	3/4				7/8	1 1/8		
	Dimension	W x D x H	mm	1200 x 882 x 2044				2013 x 872 x 2120			
	Weight	Net		kg	308	310	316	318	400	410	420
Gross			kg	373	375	381	383	465	475	485	

ZXD Family: Digital medium temperature

Technical data at 50 Hz - TFD/TFM

Family				ZXD										
Nominal Rating	Horsepower	HP		3	4	5	6	7.5	7.6	9	12	16	20	
Model Name				ZXD030B0	ZXD040B0	ZXD050B0	ZXD060B0	ZXD075B0	ZXD076B0	ZXD090BE	ZXD120BE	ZXD160BE	ZXD200BE	
Performance	Sound Pressure Level	@1m	dB(A)	56	60					62	65	69	69	
Compressor	Rated Load Ampere	R404A	Amp	7.4	7.7	10.4	12.4	12.4	12.4	14.6	9.6+10.1	11.1+11.1	14.6+14.6	
		R407F	Amp	7.4	7.9	10.0	12.1	12.1	12.1	/	/	/	/	
	Locked Rotor Ampere	R404A	Amp	40.0	48.0	64.0	74.0	100.0	100.0	102	74	74	102	
		R407F	Amp	40.0	48.0	64.0	74.0	100.0	100.0	/	/	/	/	
	Oil Type	R404A	POE											
	R407F	POE												
	Oil Recharge Volume	R404A/R407F	Liters	1.12	1.24	1.77	1.77	1.77	1.77	1.89	1.9+1.9	1.9+1.9	1.9+1.9	
Fan Motor	Number of Fan		Pieces	1	2	2	2	2	2	2	2	2	2	
	Diameter		mm	450	450	450	450	450	450	450	600	600	630	
	Fan Speed		rpm	830	830	830	830	830	830	830	930	930	920	
	Air Flow	Total	m³/h	2922	5910	5910	5910	5910	5910	5910	14040	14040	16380	
	Total Fan Motor Power	Input	W	116	246	246	246	246	246	246	700	700	960	
Others	Oil Separator/Reservoir Charge	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6/4	0.6/4	0.6/4	
	Receiver Volume	R404A	kg	4.4	6.3	6.3	6.3	6.3	6.3	6.3	17	21.6	21.6	
		R407F	kg	4.5	6.4	6.4	6.4	6.4	6.4	/	/	/	/	
	Pipes	Suction OD	Inch	3/4	7/8	7/8	7/8	7/8	7/8	7/8	7/8	1 3/8	1 3/8	1 3/8
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
	Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 1242						1645 x 1010 x 1066			1645 x 1010 x 1235
Weight	Net	kg	85	104	112	114	119	122	138	357	362	362		
	Gross	kg	123	148	156	158	163	171	158	457	462	462		

ZXL Family: Low temperature

Technical data at 50 Hz - PFJ

Family				ZXL		
Nominal Rating	Horsepower	HP		2	2.5	3
Model Name				ZXL020BE	ZXL025BE	ZXL030BE
Performance	Sound Pressure Level	@1m	dB(A)	56		
Compressor	Rated Load Ampere	R404A	Amp	12.7	13.3	15.1
		R407F	Amp	12.7	13.3	15.1
	Locked Rotor Ampere	R404A	Amp	56.6	73.7	82.3
		R407F	Amp	56.6	73.7	82.3
	Oil Type	R404A		POE		
	R407F		POE			
	Oil Recharge Volume	R404A/R407F		0.56	0.56	0.56
Fan Motor	Number of Fan		Pieces	1	1	1
	Diameter		mm	450	450	450
	Fan Speed		rpm	830	830	830
	Air Flow	Total	m ³ /h	2922	2922	2922
	Total Fan Motor Power	Input	W	116	116	116
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5
	Receiver Volume	R404A	kg	4.4	4.4	4.4
		R407F	kg	4.5	4.5	4.5
	Pipes	Suction OD	Inch	3/4	3/4	3/4
		Liquid OD	Inch	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 840		
Weight	Net	kg	79	81	81	
	Gross	kg	117	119	119	

ZXL Family: Low temperature

Technical data at 50 Hz - TFD

Family				ZXL								
Nominal Rating	Horsepower	HP		2	2.5	3	3.5	4	5	6	7.5	
Model Name				ZXL020BE	ZXL025BE	ZXL030BE	ZXL035BE	ZXL040BE	ZXL050BE	ZXL060BE	ZXL075BE	
Performance	Sound Pressure Level	@1m	dB(A)	56					60			
Compressor	Rated Load	R404A	Amp	5.6	6.2	6.0	8.3	8.6	10.0	11.1	14.6	
	Amperage	R407F	Amp	5.6	6.2	6.0	8.3	8.6	10.0	11.1	14.6	
	Locked Rotor	R404A	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0	
	Amperage	R407F	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0	
	Oil Type	R404A	POE									
	R407F	POE										
	Oil Recharge Volume	R404A/R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	
Fan Motor	Number of Fan		Pieces	1	1	1	1	1	2	2	2	
	Diameter		mm	450	450	450	450	450	450	450	450	
	Fan Speed		rpm	830	830	830	830	830	830	830	850	
	Air Flow	Total	m³/h	2922	2922	2922	2922	2922	5910	5910	5910	
	Total Fan Motor Power	Input	W	116	116	116	116	116	246	246	246	
Others	Oil Separator/Reservoir Charge	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	Receiver Volume	R404A	kg	4.4	4.4	4.4	4.4	4.4	6.3	6.3	6.3	
		R407F	kg	4.5	4.5	4.5	4.5	4.5	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	1 3/8	
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	
	Dimension	W x D x H	mm	1029 x 424 x 840					1029 x 424 x 1242			
Weight	Net	kg	79	81	81	93	93	106	116	121		
	Gross	kg	117	119	119	131	131	150	165	170		

ZXL Family: Low temperature

Technical data at 50 Hz - TFM, TEM

Family				ZXL					
Nominal Rating	Horsepower	HP	10	13	15	20	25	30	
Model Name			ZXL100BE	ZXL130BE	ZXL150BE	ZXL200BE	ZXL250BE	ZXL300BE	
Performance	Sound Pressure Level	@1m	dB(A)	67	69	69	71	75	75
Compressor	Rated Load Ampere		Amp	21.7	23.0	23.0	28.6	37.1	46.7
	Locked Rotor Ampere		Amp	118	118	139	168	246	310
	Oil Type			POE					
	Oil Recharge Volume		Liters	3.25			6.00		
Fan Motor	Number of Fan		Pieces	1			2		
	Diameter		mm	710					
	Fan Speed		rpm	1010					
	Air Flow	Total	m ³ /h	16632	16632	15372	15372	29592	25200
	Total Fan Motor Power	Input	W	855	855	980	980	2300	2600
Others	Oil Separator/Reservoir Charge	Volume	Liters	0.6					
	Receiver Volume	R404A	kg	17			31.8		
	Pipes	Suction OD	Inch	1 3/8			2 1/8		
		Liquid OD	Inch	3/4			7/8		
	Dimension	W x D x H	mm	1200 x 882 x 2044			2013 x 872 x 2120		
	Weight	Net	kg	334	334	340	340	440	455
Gross		kg	399	399	405	405	505	520	

ZXLD Family: Low temperature



Technical data at 50 Hz -TFD/TFM

Family				ZXLD			
Nominal Rating	Horsepower	HP		9	12	16	20
Model Name				ZXLD090BE	ZXLD120BE	ZXLD160BE	ZXLD200BE
Performance	Sound Pressure Level	@1m	dB(A)	62	69	69	69
Compressor	Rated Load Ampere	R404A	Amp	14.6	11.1+11.1	14.6+14.6	14.6+14.6
	Locked Rotor Ampere	R404A	Amp	102	74	102	121
	Oil Type	R404A		POE			
	Oil Recharge Volume		Liters	1.89	1.9+1.9	1.9+1.9	1.9+1.9
Fan Motor	Number of Fan		Pieces	2	2	2	2
	Diameter		mm	450	600	600	630
	Fan Speed		rpm	830	930	930	920
	Air Flow	Total	m ³ /h	5910	14040	14040	16380
	Total Fan Motor Power	Input	W	246	700	700	960
Others	Oil Separator / Reservoir Charge	Volume	Liters	0.5	0.6/4	0.6/4	0.6/4
	Receiver Volume (at 32°C)		kg	6.3	17	21.6	21.6
	Pipes	Suction OD	Inch	7/8	1 3/8	1 3/8	1 3/8
		Liquid OD	Inch	1/2	3/4	3/4	3/4
	Dimension	W x D x H	mm	1029 x 424 x 1242	1645 x 1010 x 1066		1645 x 1010 x 1235
	Weight	Net	kg	138	362	362	362
Gross		kg	158	462	462	462	

Dimensional drawings

ZX - PFJ (2 HP-4 HP)
 ZX - TFD (2HP-4HP)
 ZXL - PFJ (2HP-3HP)
 ZXL - TFD (2HP-4HP)
 ZXD - TFD (3HP)



ZX - TFD (5HP-7.6HP)
 ZXL - TFD (5HP-7.5HP)
 ZXD - TFD (4HP-9HP), ZXLD-TFD (9HP)

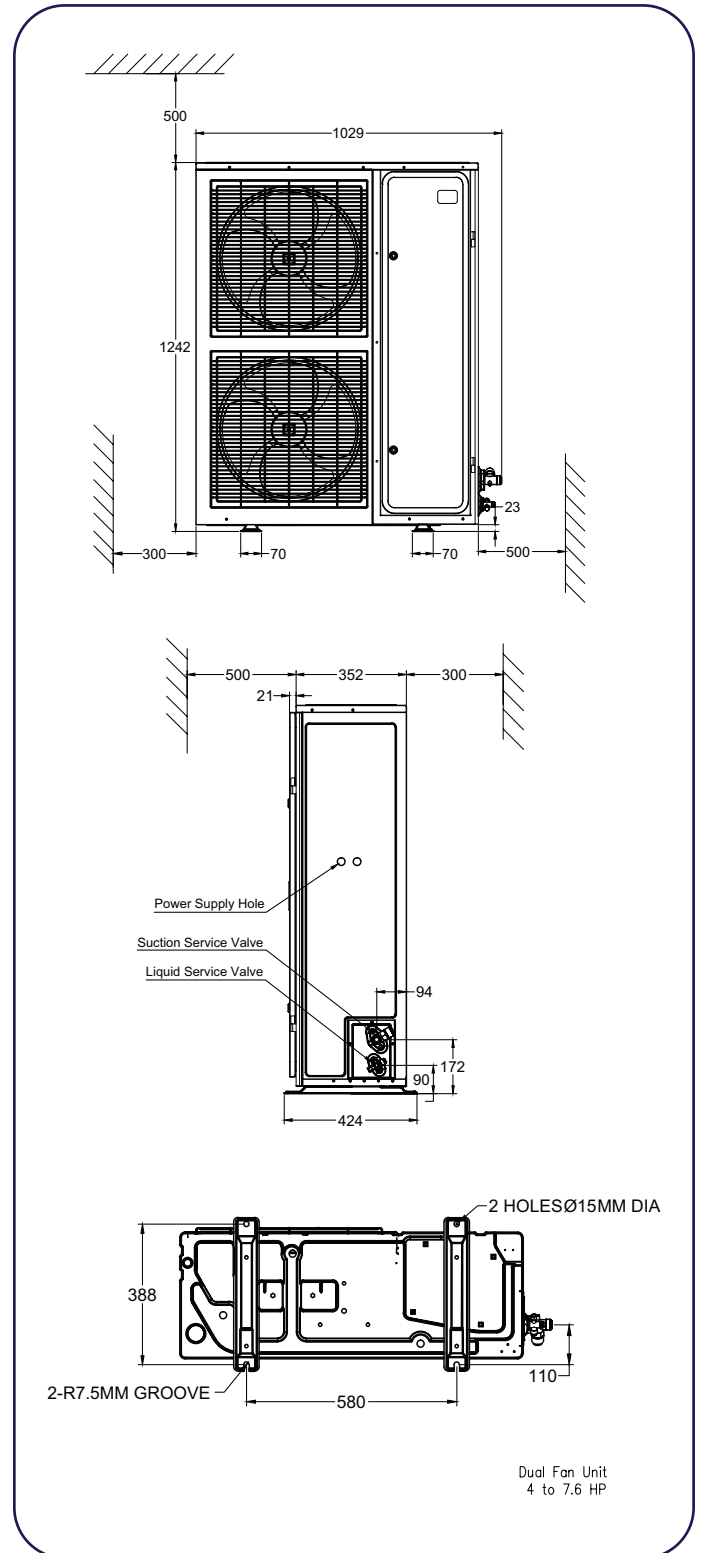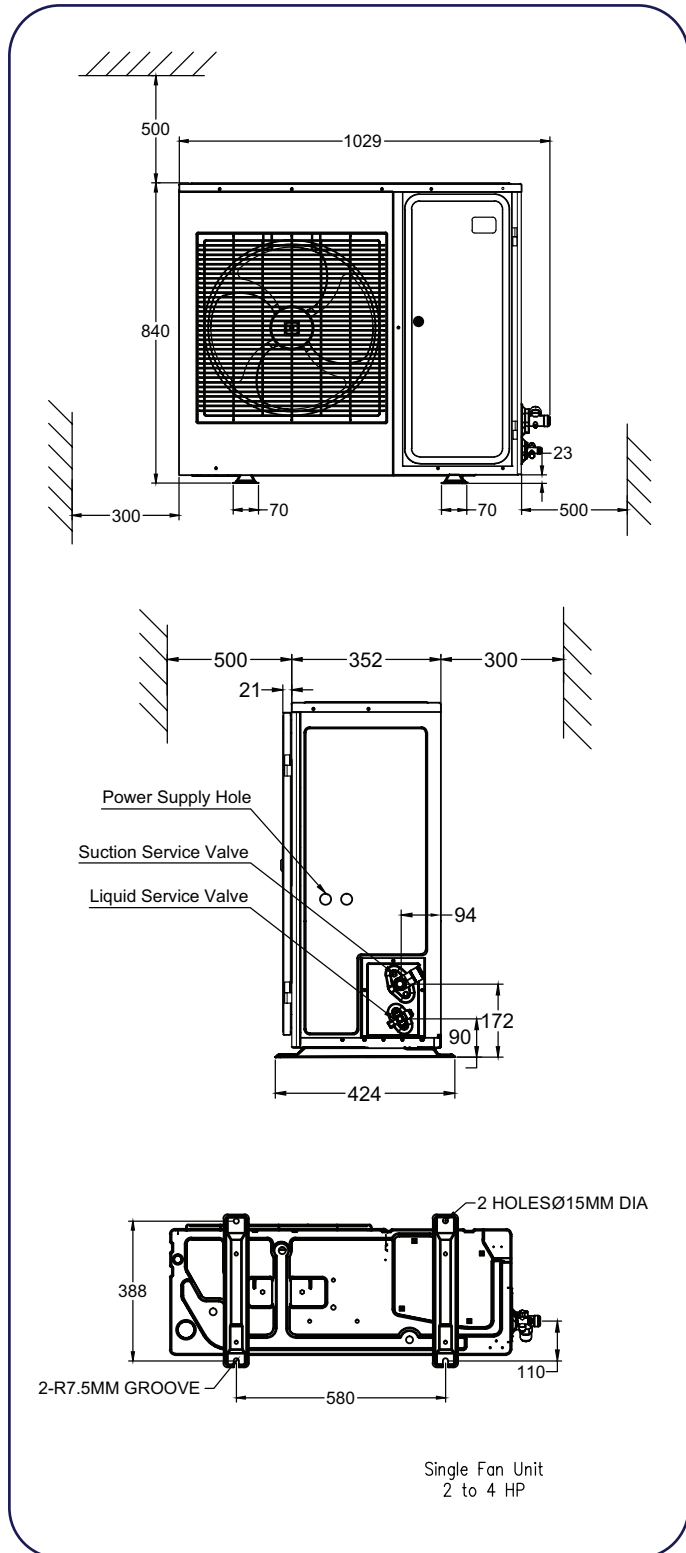

Dimensional drawings


ZX-TFM (9 HP-15 HP), ZXL- TFM (10HP-20 HP)

ZXD- TFM (12 HP-20 HP), ZXLD- TFM (12 HP-20 HP)

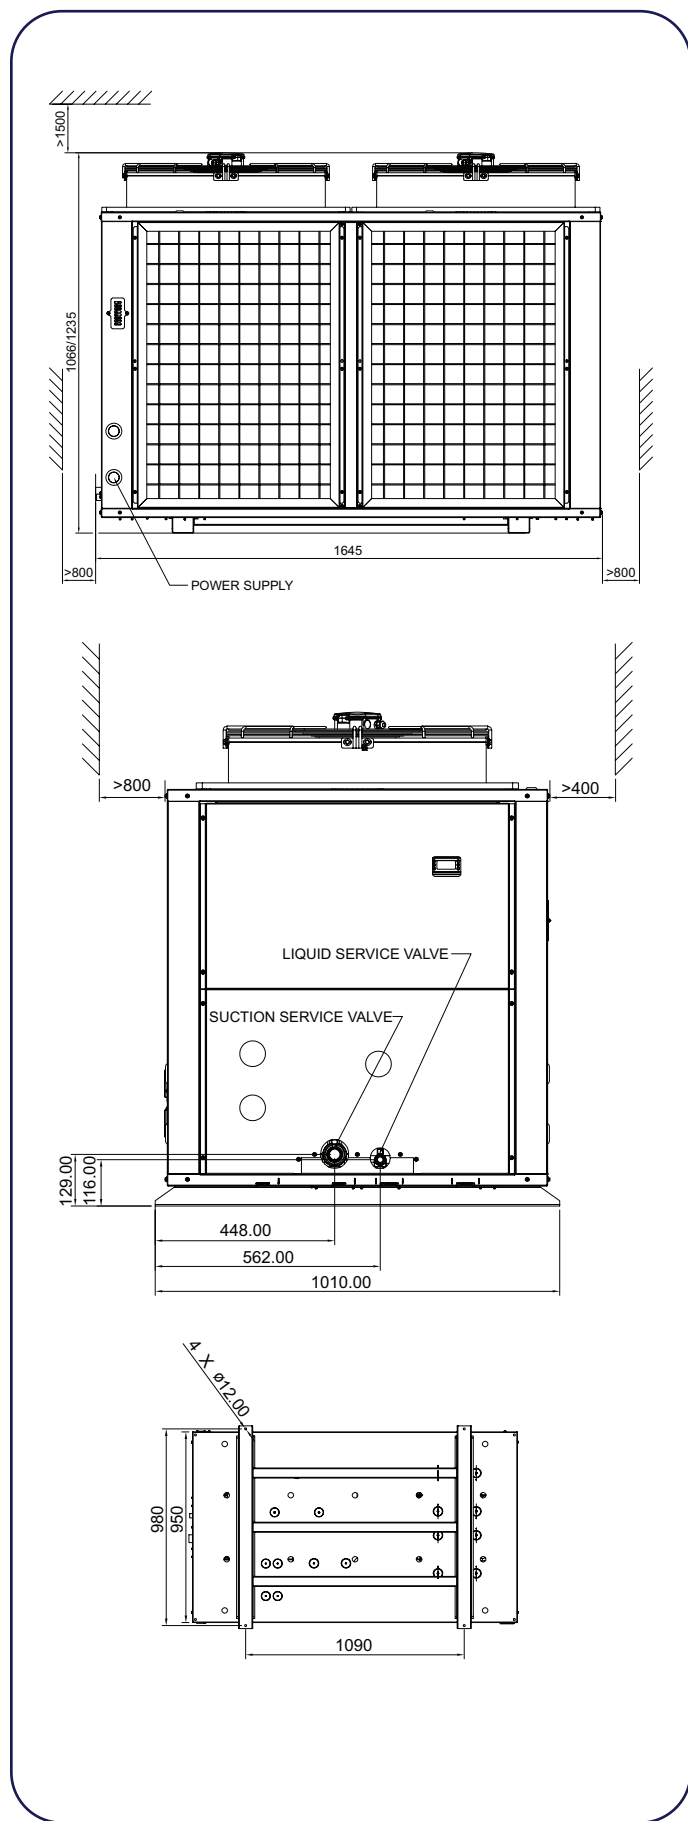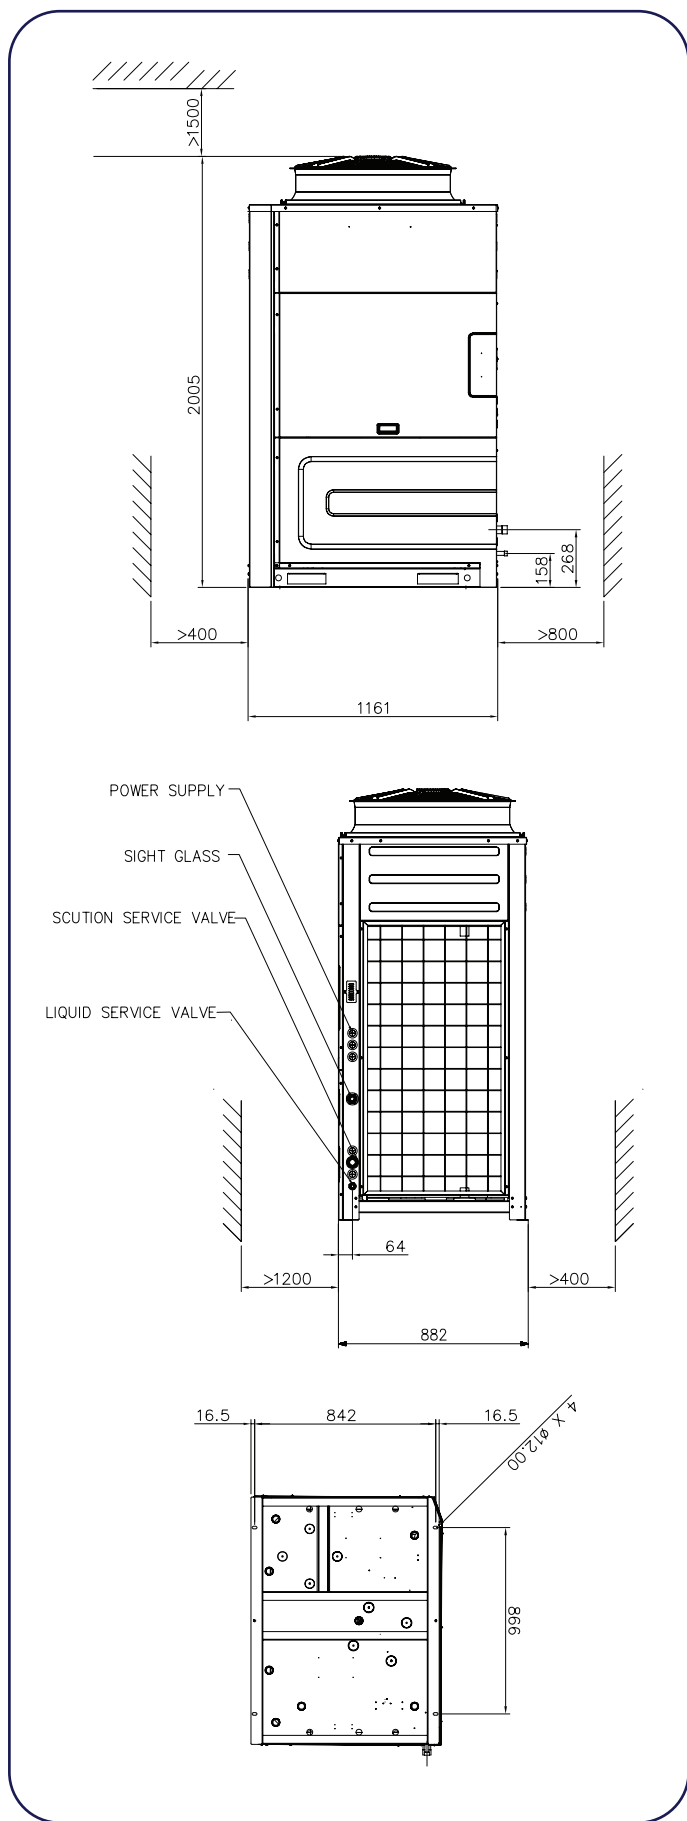

Dimensional drawings

ZX-TWM, TEM (22HP-30HP)

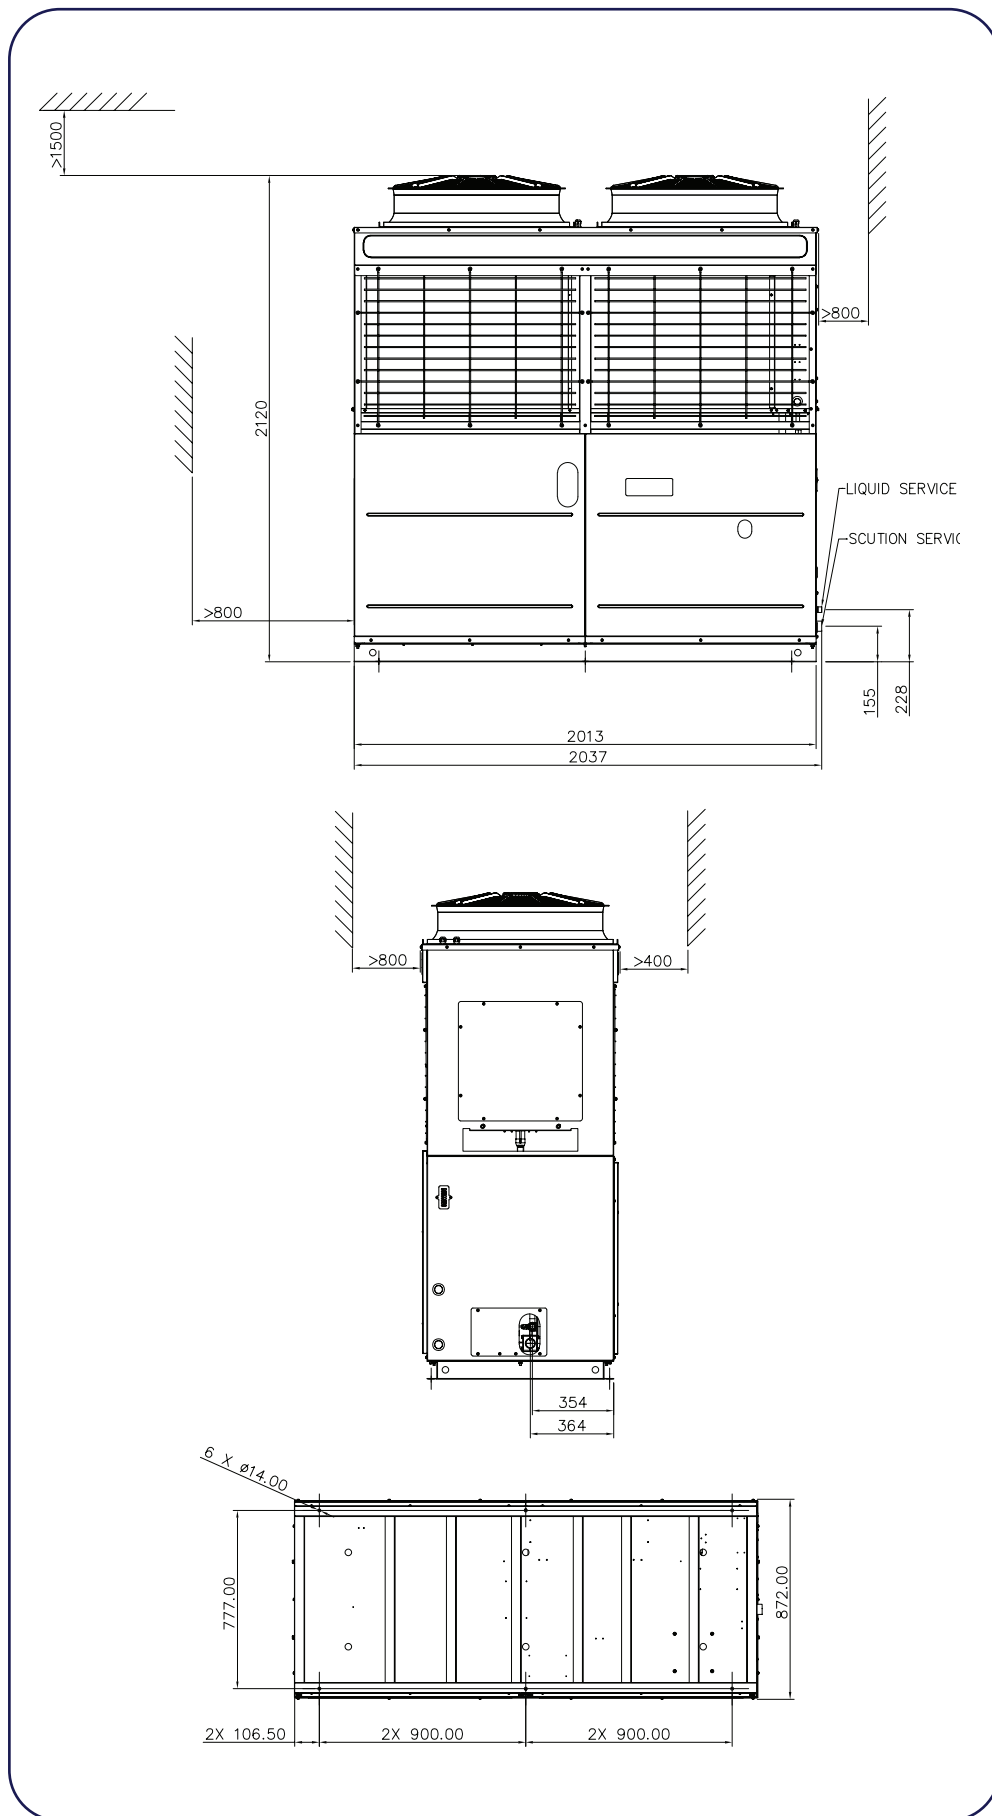

Packing information

Container loading, ZX Platform condensing unit					
Family	Model	Motor code	Fan type	20FT	40FT
ZX	ZX020BE	PFJ/TFD	Single Fan	40	80
	ZX025BE	PFJ		40	80
	ZX030BE	PFJ/TFD		40	80
	ZX040BE	PFJ/TFD		40	80
	ZX050BE	TFD	Dual Fan	20	40
	ZX060BE	TFD		20	40
	ZX075BE	TFD		20	40
	ZX076BE	TFD		20	40
	ZX090BE	TFM	Single Fan	8	18
	ZX100BE	TFM		8	18
	ZX130BE	TFM		8	18
	ZX150BE	TFM		8	18
	ZX220BE	TWM	Dual Fan	5'	11'
ZX250BE	TWM	5'		11'	
ZX300BE	TWM	5'		11'	
ZXD	ZXD030BE	TFD	Single Fan	40	80
	ZXD040BE	TFD	Dual Fan	20	40
	ZXD050BE	TFD		20	40
	ZXD060BE	TFD		20	40
	ZXD075BE	TFD		20	40
	ZXD076BE	TFD		20	40
	ZXD090BE	TFD		20	40
	ZXD120BE	TFM	Top air throw (Dual Fan)	6	13
	ZXD160BE	TFM		6	13
ZXD200BE	TFM	6		13	
ZXL/ZXLD	ZXL020BE	PFJ/TFD	Single Fan	40	80
	ZXL025BE	PFJ/TFD		40	80
	ZXL030BE	PFJ/TFD		40	80
	ZXL035BE	TFD		40	80
	ZXL040BE	TFD		40	80
	ZXL050BE	TFD	Dual Fan	20	40
	ZXL060BE	TFD		20	40
	ZXL075BE	TFD		20	40
	ZXLD090BE	TFD		20	40
	ZXL100BE	TFM	Single Fan	8	18
	ZXL130BE	TFM		8	18
	ZXL150BE	TFM		8	18
	ZXL200BE	TFM		8	18
	ZXL250BE	TEM	Dual Fan	5'	11'
	ZXL300BE	TEM		5'	11'
	ZXLD120BE	TFM	Top air throw (Dual Fan)	6	13
	ZXLD160BE	TFM		6	13
ZXLD200BE	TFM	6		13	

Note: ' High Type Container Only

Conversion chart

Units conversion chart	
KCALH x 3.9683 = BTUH	CUBIC CENTIMETERS x 0.06102 = CUBIC INCHES
WATTS x 3.413 = BTU/H	CUBIC METERS x 35.3147 = CUBIC FEET
1.80 x °C + 32 = °F	LITERS x 33.8181 = FLUID OUNCES
KILOGRAMS x 2.205 = POUNDS	KILOWATTS x 1.341 = HORSEPOWER
MILLIMETERS x 0.0394 = INCHES	BAR x 14.7 = PSI

General information

Technical data are correct at the time of printing. Updates may occur, and should you need confirmation of a specific value, please contact Copeland clearly stating the information required.

Copeland cannot be held responsible for errors in capacities, dimensions, etc., stated herein. Products, specifications and data in this literature are subject to change without notice.

The information given herein is based on data and tests which Copeland believes to be reliable and which are in accordance with today's technical knowledge. It is intended for use by persons having the appropriate technical knowledge and skill, at their own discretion and risk. Our products are designed and adapted for fixed locations. For mobile applications, failures may occur.

The suitability for this has to be assured from the plant manufacturer, which may include making appropriate tests.

Note:

The components listed in this catalogue are not released for use with caustic, poisonous or flammable substances. Copeland cannot be held responsible for any damage caused by using these substances.

About Copeland

Copeland, a global provider of sustainable climate solutions, combines category-leading brands in compression, controls, software and monitoring for heating, cooling and refrigeration. With best-in-class engineering and design and the broadest portfolio of modulated solutions, we're not just setting the standard for compressor leadership; we're pioneering its evolution. Combining our technology with our smart energy management solutions, we can regulate, track and optimize conditions to help protect temperature-sensitive goods over land and sea, while delivering comfort in any space. Through energy-efficient products, regulation-ready solutions and expertise, we're revolutionizing the next generation of climate technology for the better. For more information, visit copeland.com.

Contact list

South Africa

11 Quark Crescent, Linbro Business Park Sandton 2065, South Africa

Toll Free: 0800 980 3711 | Tel: +27 11 451 3700 | Fax: +27 11 451 3800

United Arab Emirates

Jebel Ali Free Zone
P.O. Box 26382, Dubai
United Arab Emirates
Toll Free: 8000 441 3428
Tel: +971 4 8118100
Fax: +971 4 8865465

Saudi Arabia

P.O. Box 34332 - 3620
2nd Industrial City, 67 St.
Dammam, Saudi Arabia
Toll Free: 8008 443 426
Tel: +966 3 8147560
Fax: +966 3 8147570

Egypt

P.O.Box 11799
11 Mustafa Refaat Street
Sheraton, Heliopolis
Cairo, Egypt
Tel: +20 2 226 5854